



SERIALIO
.COM
 715 Discovery Blvd. Ste 510
 Cedar Park, TX 78613

Tel: (512) 994-3630
 Fax: (866) 546-4523

For sales inquiries:
 sales@serialio.com
For technical support:
 support@serialio.com

SCANFOB® 4000n Quick Start Guide

Bluetooth Mode



Bluetooth-SPP
 (Serial Port Profile - SSP)



Bluetooth - HID
 (Human Interface Device – SSP)

Defaults



Reset Defaults

iOS Mode



Apple iOS Keyboard Mode
 (also enables keyboard toggle)

**Unit must be disconnected from host device to
 activate this setting*

USB Communications




USB Enabled



USB Disabled

*iOS Apps supporting MFi mode
 -Grid-In-Hand® Mobile Grid
 -Order-In-Hand® Mobile Order
 -List-In-Hand® Mobile List
 -iScanBrowser

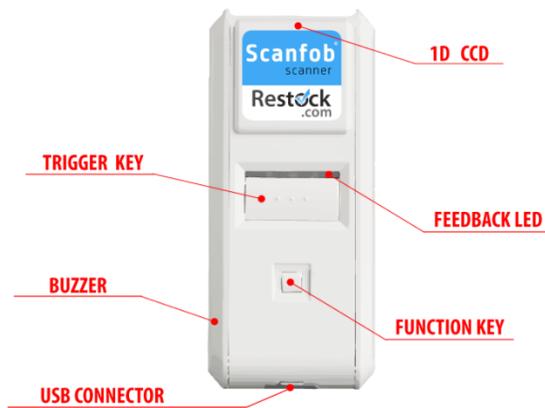

Setting up Scanfob® 4000 in SPP mode for use with SerialMagic or SerialMagic Gears Android Mobile Device or Windows PC:

1. **Charge** – Connect the Scanfob® 4000 to a powered USB port for about 4 hours, or until LED shows green. Only charge the Scanfob® 4000 with approved charging devices. Use of non-approved charging devices can damage the battery and void the warranty.
2. **Install SerialMagic** – SerialMagic is available at <https://goo.gl/q4srnb>. Download & install SerialMagic for your platform. Android users should visit the Google Play Store for SerialMagic Gears.
3. **Set Scanfob® 4000 to SPP mode** – Scan the “Bluetooth SPP” barcode on Pg 1 to set the scanner’s Bluetooth mode.
4. **Put Scanfob® 4000 in Discoverable Mode** – Hold the **Function Key** down on the scanner for approximately 5 seconds until a blue blinking light appears in the **Feedback LED**.
5. **Open SerialMagic Gears** – Once application is open on your Android device, hit the connect button. Select *Scanfob* device from available devices by tapping on the scanner name.

Congratulations! The Scanfob® 4000 is now connected! For instructions on scanning into third party applications, Android users should visit serialio.com/support/SerialMagic/Android/SMKeys_Setup.php

Setting up Scanfob® 4000 in SPP mode for use in HID Mode (like a Bluetooth Keyboard) iOS Instructions:

1. **Charge** – Connect the Scanfob® 4000 to a powered USB port for about 4 hours, or until LED shows green. Only charge the Scanfob® 4000 with approved charging devices. Use of non-approved charging devices can damage the battery and void the warranty.
2. **Set Scanfob® 4000 to HID mode** – Scan the “Bluetooth - HID” barcode on Pg 1 to set the scanner’s Bluetooth mode.
3. **Put Scanfob® 4000 in Discoverable Mode** – Hold the **Function Key** down on the scanner for approximately 5 seconds until a blue blinking light appears in the **Feedback LED**.
4. **Open Bluetooth Settings** – Once Scanfob® 4000 is blinking blue, open your Bluetooth Settings menu on your iOS device. Select *Scanfob* device from available devices by tapping on the scanner name to connect.

Congratulations! The Scanfob® 4000 is now connected! To toggle keyboard on or off, scan “Apple iOS Keyboard Mode” barcode found on page one.