


# TECHNICAL INFORMATION MANUAL

Revision 3 – 24 October 2016

## qID<sub>mini</sub> R1170I

Keyfob Bluetooth UHF RFID Reader

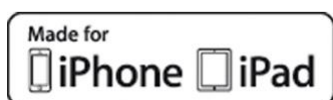

**easy2read**®



Visit [qIDmini R1170I](#) web page, you will find the latest revision of data sheets, manuals, certifications, technical drawings, software and firmware. All you need to start using your reader in a few clicks!

## Scope of Manual

The goal of this manual is to provide the basic information to work with the qIDmini R1170I Keyfob Bluetooth UHF RFID Reader.

This manual refers to:

- qID mini firmware revision  $\geq 2.8.0$
- [SDK](#) (Software Development Kit) revision  $\geq 4.7.0$

## Change Document Record

Date	Revision	Changes	Pages
23 Jun 2014	00	Preliminary release	-
08 Jul 2014	01	Added note in the <i>Tab. 1.2: qIDmini R1170I Power LED Status Table</i>	9
		Added warning in the <i>Charging</i> paragraph	10
11 Dec 2015	02	Added <i>qIDmini Regulatory Compliance</i> chapter	67
		Modified <i>Product Description</i> paragraph	2
		Modified <i>Tab. 8.1: qIDmini R1170I Configuration Menu</i>	55
		Modified <i>Introduction</i> paragraph in the <i>qIDmini Configuration Menu</i> chapter	54
		Added <i>qIDmini OFFLINE</i> profile chapter	45
		Modified <i>PROFILE</i> paragraph	56
		Added <i>CLOCK</i> paragraph	58
		Added <i>RA0005 - qDock - qIDmini docking station</i> in <i>Accessories and Ordering Options</i> paragraph	11, 13
		Modified <i>Introduction</i> paragraph in the <i>Getting Started</i> chapter	14
		Modified <i>USB Communication Setup</i> paragraph in the <i>qIDmini HID profile, qIDmini EASY2RD Profile</i> and <i>qIDmini OFFLINE profile</i> chapter	27, 41, 45
		Added <i>HID profile options</i> paragraph	34
		Added <i>EASY2READ profile options</i> paragraph	19
24 Oct 2016	03	Added qIDmini NF in <i>Product Description</i> and <i>Ordering Options</i> paragraph	7, 13
		Added <i>Technical Specifications Table (Mod. R1170IENFHD and R1170IUNFHD)</i>	63
		Added <i>qIDmini BUFFER</i> profile	47, 54, 56
		Added new options in the <i>qIDmini Configuration Menu: OPTIONS and PINCODE</i>	54, 59
		Added new options in the <i>HID profile options: PREFIX, SUFFIX and KBOARD</i>	35, 36
		Added qIDmini NF certifications	67÷74

# Reference Document

- [RD1] G.S.D. s.r.l. - Report CE mark – R1170IEHIDP / R1170IEAPLP – qID mini Keyfob Bluetooth UHF RFID Reader. Test report n. 14413 Rev. 03 – 07 October 2015
- [RD2] G.S.D. s.r.l. - Report Federal Communication Commission (FCC) – R1170IU – qID mini Keyfob Bluetooth UHF RFID Reader. Test report n. FCC-14414 Rev. 02 – 30 September 2014
- [RD3] EPCglobal: EPC Radio-Frequency Identity Protocols Class-1 Generation-2 UHF RFID Protocol for Communications at 860 MHz – 960 MHz, Version 2.0.1 (April, 2015).
- [RD4] G.S.D. s.r.l. - Report CE mark – R1170IENF – qID mini Keyfob Bluetooth UHF RFID Reader. Test report n. 16601A Rev. 02 – 10 September 2016
- [RD5] G.S.D. s.r.l. - Report Federal Communication Commission (FCC) – R1170IUNF – qID mini Keyfob Bluetooth UHF RFID Reader. Test report n. FCC-16601B Rev. 01 – 10 June 2016
- [RD6] G.S.D. s.r.l. - Report Federal Communication Commission (FCC) – R1170IUNF – qID mini Keyfob Bluetooth UHF RFID Reader. Test report n. FCC-16601 Rev. 03 – 08 July 2016
- [RD7] Shanghai Wu Wei Radio Testing Laboratory Corporation - Radio Transmission Equipment Type Approval (SRRC) – R1170IUNF – qID mini Keyfob Bluetooth UHF RFID Reader. Test report n. SRTL/BG-A20160150123– 23 September 2016

---

## CAEN RFID srl

Via Vetraia, 11 55049 Viareggio (LU) - ITALY  
Tel. +39.0584.388.398 Fax +39.0584.388.959  
[info@caenrfid.com](mailto:info@caenrfid.com)  
[www.caenrfid.com](http://www.caenrfid.com)

---

© CAEN RFID srl – 2016

## Disclaimer

No part of this manual may be reproduced in any form or by any means, electronic, mechanical, recording, or otherwise, without the prior written permission of CAEN RFID.

The information contained herein has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. CAEN RFID reserves the right to modify its products specifications without giving any notice; for up to date information please visit [www.caenrfid.com](http://www.caenrfid.com).

---

## Federal Communications Commission (FCC) Notice

This device was tested and found to comply with the limits set forth in Part 15 of the FCC Rules. Operation is subject to the following conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

This device generates, uses, and can radiate radio frequency energy. If not installed and used in accordance with the instruction manual, the product may cause harmful interference to radio communications. Operation of this product in a residential area is likely to cause harmful interference, in which case, the user is required to correct the interference at their own expense. The authority to operate this product is conditioned by the requirements that no modifications be made to the equipment unless the changes or modifications are expressly approved by CAEN RFID.

---

**Disposal of the product**

Do not dispose the product in municipal or household waste. Please check your local regulations for disposal/recycle of electronic products.



# Index

	Scope of Manual.....	2
	Change Document Record.....	2
	Reference Document.....	3
<b>Index</b> .....		<b>5</b>
<b>List of Figures</b> .....		<b>6</b>
<b>List of Tables</b> .....		<b>6</b>
<b>1 INTRODUCTION</b> .....		<b>7</b>
Product Description.....		7
Front panel.....		9
Charging.....		10
USB connector .....		10
Accessories .....		11
Development Kit.....		12
Ordering Options.....		13
<b>2 GETTING STARTED</b> .....		<b>14</b>
Introduction.....		14
Bluetooth Communication Setup using the Easy Controller for Android .....		14
<b>3 qIDmini EASY2RD PROFILE</b> .....		<b>19</b>
Introduction.....		19
EASY2READ profile options.....		19
DISPLAY.....		19
Android devices .....		20
Bluetooth Communication Setup using the Easy Controller for Android .....		20
Windows PCs .....		25
Bluetooth Communication Setup.....		25
USB Communication Setup .....		27
Connecting the qIDmini using the Easy Controller for Windows .....		29
iOS devices.....		31
Bluetooth Communication Setup.....		31
<b>4 qIDmini HID PROFILE</b> .....		<b>34</b>
Introduction.....		34
HID profile options .....		34
FORMAT .....		34
DISPLAY.....		35
APPLEKB.....		35
PREFIX .....		35
SUFFIX .....		35
KBOARD .....		36
Android devices .....		36
Bluetooth Communication Setup.....		36
Windows PCs .....		38
Bluetooth Communication Setup.....		38
USB Communication Setup .....		41
iOS devices.....		43
Bluetooth Communication Setup.....		43
<b>5 qIDmini OFFLINE PROFILE</b> .....		<b>45</b>
Introduction.....		45
OFFLINE profile options .....		45
DWNLOAD.....		45
ERASE.....		46
VIEWTAG.....		46
BTSCAN .....		46
LOGOPT.....		46
DISPLAY.....		46
<b>6 qIDmini BUFFER PROFILE</b> .....		<b>47</b>
Introduction.....		47
Communication Setup .....		47
Android devices .....		47
Windows PCs .....		49
Bluetooth Communication Setup .....		49
USB Communication Setup.....		51

	Download .....	52
<b>7</b>	<b>RESET THE qIDmini READER.....</b>	<b>53</b>
<b>8</b>	<b>qIDmini CONFIGURATION MENU.....</b>	<b>54</b>
	Introduction.....	54
	PROFILE .....	56
	BEEP.....	57
	VIBRATE .....	57
	POWER .....	58
	CLOCK .....	58
	OPTIONS.....	59
	PINCODE.....	59
<b>9</b>	<b>qIDmini FIRMWARE UPGRADE .....</b>	<b>60</b>
	Firmware Upgrade.....	60
<b>10</b>	<b>qIDmini TECHNICAL SPECIFICATIONS.....</b>	<b>62</b>
	Technical Specifications Table (Mod. R1170IEHIDP, R1170IEAPLP, R1170IUHIDP and R1170IUAPLP) .....	62
	Technical Specifications Table (Mod. R1170IENFHD and R1170IUNFHD) .....	63
	Reader – Tag Link Profiles.....	64
	Radiation Patterns.....	65
	Model R1170IEHIDP and R1170IEAPLP (ETSI version) .....	65
	Model R1170IUHIDP and R1170IUAPLP (FCC version).....	66
<b>11</b>	<b>qIDmini REGULATORY COMPLIANCE .....</b>	<b>67</b>
	FCC Compliance.....	67
	CE Compliance .....	68
	SRRC Compliance.....	68
	RoHS EU Directive.....	68
	qIDmini CE Declaration of Conformity.....	69
	qIDmini FCC Grant part B.....	70
	qIDmini FCC Grant part C.....	71
	qIDminiNF CE Declaration of Conformity .....	72
	qIDminiNF FCC Grant part B .....	73
	qIDminiNF FCC Grant part C .....	74
	qIDminiNF SRRC Type Approval Certificate .....	75

## List of Figures

Fig. 1.1:	qIDmini R1170I Front Panel .....	9
Fig. 1.2:	qIDmini R1170I Accessories .....	11
Fig. 1.3:	R1170IDK – qIDmini Keyfob Bluetooth UHF RFID Reader Development Kit .....	12
Fig. 10.1:	qIDmini R1170IE Radiation pattern H plane .....	65
Fig. 10.2:	qIDmini R1170IE Radiation pattern V plane.....	65
Fig. 10.3:	qIDmini R1170IU Radiation pattern H plane .....	66
Fig. 10.4:	qIDmini R1170IU Radiation pattern V plane .....	66

## List of Tables

Tab. 1.1:	qIDmini R1170I Front Panel LEDs and Buttons .....	9
Tab. 1.2:	qIDmini R1170I Power LED Status Table .....	9
Tab. 1.3:	qIDmini R1170I Bluetooth LED status table .....	9
Tab. 1.4:	Compatibility table between the Apple/HID models and different OS.....	13
Tab. 3.1:	Compatibility table between the Apple/HID models and different OS in the EASY2RD profile.....	19
Tab. 4.1:	Compatibility table between the Apple/HID models and different OS in the HID profile .....	34
Tab. 8.1:	qIDmini R1170I Configuration Menu .....	55
Tab. 10.1:	qIDmini R1170I Technical Specifications Table .....	62
Tab. 10.2:	qIDminiNF R1170INF Technical Specifications Table .....	63
Tab. 10.3:	qIDmini R1170I Reader to tag link profiles .....	64

# 1 INTRODUCTION

## Product Description

The qIDmini (Model R1170I) is a handheld reader of the easy2read® product family, compliant with UHF RFID ISO 18000-6C/EPC C1G2 standards.

The qIDmini has an integrated antenna suited for short to medium range applications and, thanks to the Bluetooth® communication interface, it is a perfect UHF RFID add-on for any Bluetooth® enabled host such as a PC, a smartphone, a PDA or a tablet. The reader is compatible with Windows XP/7, Windows CE/Mobile, Android, iPhone and iPad.

The HID version supports native keyboard emulation allowing to interact directly with legacy application, office automation SW or any other generic solution requiring manual input.



The qIDminiNF version is specifically designed to optimize the reading performances with near field miniaturized tags like the Murata Magicstrap and Hitachi USPT. The near field antenna of the qIDminiNF reader permits to read those small tags even when embedded in small parts like watches, jewels or mechanic parts. For this reason, the combination of the miniaturized near field tags and the qIDminiNF reader is a great tool to retrieve the serial numbers in small objects and check the originality of parts.

The reader can also operate in “Offline Mode”, allowing to store EPC codes into the internal memory when the communication links (USB or Bluetooth®) are not available.

When paired to a smartphone or a tablet, the qIDmini is a cost effective alternative to more expensive handheld devices.

Designed for mobile operators in indoor or outdoor areas, the qIDmini is ideal for in-store inventory management, field sales mobility, service and maintenance applications.

The reader is available in **ETSI**, **FCC** or **SRRC** version (see § *Ordering Options* page 13):

- 865.600÷867.600 MHz (ETSI EN 302 208 v. 1.4.1) (Mod. R1170IEHIDP, R1170IEAPLP and R1170IENFHP)
- 902÷928 MHz (FCC part 15.247) (Mod. R1170IUHIDP, R1170IUAPLP and R1170IUNFHP)
- 920.625÷924.375 MHz (SRRC RFID national standards) (Mod. R1170IUNFHD – OPT. WPE1170NFACN)

The reader is available in two models: **APPLE** or **HID** (see § *Ordering Options* page 13):

- **APPLE** model
  - EASY2RD profile: the reader can be connected to all the devices supporting the Bluetooth SPP profile and to iOS devices.
  - HID profile: not supported.
- **HID** model
  - EASY2RD profile: the reader can be connected to all the devices supporting the Bluetooth SPP profile but not to iOS devices.
  - HID profile: the reader can be connected to all the devices supporting the Bluetooth HID profile (keyboard emulation), including iOS devices.
  - OFFLINE profile: in case of no communication link available, the reader works in offline mode. The operator goes around collecting codes and then connects the reader to the cable or, better, to the docking station in order to download the data. Stored data can be downloaded to any device except for iOS devices.
  - BUFFER profile: the reader is Bluetooth connected to the host and executes inventories of tags on button press and stores the EPCs into the internal buffer, even in case of temporary missing of Bluetooth communication. When the Bluetooth link is up, the reader can send the buffered data if requested by the host. Stored data can be downloaded to any device except for iOS devices.

For more information about EASY2RD, HID, OFFLINE and BUFFER profiles, please refer to § *PROFILE* paragraph page 56.



## Front panel

The qIDmini R1170I front panel houses the following LEDs and buttons (see figure below):

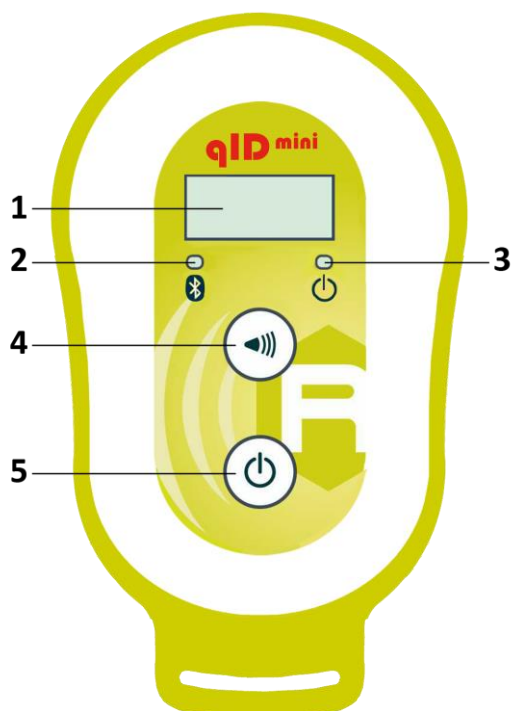


Fig. 1.1: qIDmini R1170I Front Panel

No.	Name	Description
1	Display	LCD Alphanumeric (8 chars x 2 lines)
2	Link LED	Indicates the Bluetooth and USB/charger connection (see § Tab. 1.3: qIDmini R1170I Bluetooth LED status table)
3	Power LED	Indicates the reader status and battery level (see § Tab. 1.2: qIDmini R1170I Power LED Status Table)
4	Trigger button	Inventory mode: press to perform an inventory cycle (hold down the button to repeat inventory cycles) Menu mode: quick press to scroll, hold down for a few seconds to activate an option
5	Power button	Press the button to switch on the reader, press for at least 2 seconds to switch it off Menu mode: press to return to the main menu

Tab. 1.1: qIDmini R1170I Front Panel LEDs and Buttons

Status	Description
Green	Reader is active and the battery charge is in the range 35÷100%
Orange	Reader is active and the battery charge is in the range 15÷35%
Red <sup>1</sup>	Reader is active and the battery charge is in the range 0÷15%

Tab. 1.2: qIDmini R1170I Power LED Status Table

Status	Description
OFF	No connection established
Orange	USB cable connected (both to a PC or to the AC power adapter)
Blue	Bluetooth connected

Tab. 1.3: qIDmini R1170I Bluetooth LED status table

<sup>1</sup> Blinking red LED at power on indicates that the battery is empty and a recharge shall be performed

## Charging

The qIDmini R1170I is supplied with an USB cable and a power supply for charging (see § *Accessories* page 11).

When you put the reader in charge, the display lights up and shows the blinking charge indicator. The fixed indication "charge 100%" informs you that the charging is complete.



**Warning:** EMPTY BATTERY CONDITION

In case that the battery is fully discharged, the display may not turn on when the charger is connected. In this case you have to leave the reader connected to the charger for at least 5 minutes, then disconnect the USB cable, perform the reset procedure (see § *RESET THE QIDMINI READER* page 53), switch off the reader by pressing the power button and then connect the USB cable again.

## USB connector

A micro USB Type B socket connector is located in the bottom side of qIDmini R1170I and can be used to connect the reader to an USB host port or to an AC/DC battery charger.

## Accessories

Check for the supplied accessories below:



Fig. 1.2: qIDmini R1170I Accessories

**Optional Accessories (not available for qIDminiNF version):**



## Development Kit

[R1170IDK – Keyfob Bluetooth UHF RFID Reader Development Kit](#) is available:



**Fig. 1.3: R1170IDK – qIDmini Keyfob Bluetooth UHF RFID Reader Development Kit**

The qIDmini R1170IDK development kit is a complete RFID set up, for a quick implementation of RFID solutions. It includes:

- n. 1 [R1170I qIDmini Keyfob Bluetooth UHF RFID Reader](#)
- n. 1 [Set of Labels](#)
- n. 1 [A927Z Temperature Logger Tag](#)
- n. 1 [RT0005 Temperature Logger Tag](#)
- n. 1 Lanyard
- n. 1 Retractable Roller
- n. 1 Power supply
- n. 1 USB cable

## Ordering Options

	Code	Description
Reader	<a href="#">WR1170IEAPLP</a>	R1170IEAPLP - qIDmini - Keyfob Bluetooth UHF RFID Reader (ETSI) with Apple profile
	<a href="#">WR1170IEHIDP</a>	R1170IEHIDP - qIDmini - Keyfob Bluetooth UHF RFID Reader (ETSI) with HID profile
	<a href="#">WR1170IUAPLP</a>	R1170IUAPLP - qIDmini - Keyfob Bluetooth UHF RFID Reader (FCC) with Apple profile
	<a href="#">WR1170IUHIDP</a>	R1170IUHIDP - qIDmini - Keyfob Bluetooth UHF RFID Reader (FCC) with HID profile
	<a href="#">WR1170IENFHP</a>	R1170IENFHP - qIDmini - Keyfob Bluetooth UHF NF RFID Reader (ETSI) with HID profile
	<a href="#">WR1170IUNFHP</a>	R1170IUNFHP - qIDmini - Keyfob Bluetooth UHF NF RFID Reader (FCC) with HID profile
Customization	WPE1170NFACN	R1170IUNFHP - China - Customization
Development kit	<a href="#">WR1170IDKEAP</a>	R1170IDKEAP - Development kit with qIDmini - R1170I Reader (ETSI with Apple profile) and demo tags
	<a href="#">WR1170IDKEHI</a>	R1170IDKEHI - Development kit with qIDmini - R1170I Reader (ETSI with HID profile) and demo tags
	<a href="#">WR1170IDKUAP</a>	R1170IDKUA - Development kit with qIDmini - R1170I Reader (FCC with Apple profile) and demo tags
	<a href="#">WR1170IDKUHI</a>	R1170IDKUA - Development kit with qIDmini - R1170I Reader (FCC with HID profile) and demo tags
Accessories	<a href="#">WRA0005XAAAA</a>	RA0005 - qDock - qIDmini docking station - White

In the following table it is shown the compatibility between the Apple/HID models and different Operating Systems (Android, PC and iOS):

APPLE MODEL <sup>2</sup>	PROFILES	
	EASY2RD	HID
ANDROID	√	-
PC	√	-
iOS	√	-

HID MODEL <sup>3</sup>	PROFILES			
	EASY2RD	HID	OFFLINE	BUFFER
ANDROID	√	√	√	√
PC	√	√	√	√
iOS	-	√	-	-

Tab. 1.4: Compatibility table between the Apple/HID models and different OS

<sup>2</sup> APPLE Model Ordering Options: WR1170IEAPLP, WR1170IUAPLP, WR1170IDKEAP, WR1170IDKUAP

<sup>3</sup> HID Model Ordering Options: WR1170IEHIDP, WR1170IUHIDP, WR1170IDKEHI, WR1170IDKUHI, WR1170IENFHP, WR1170IUNFHP

## 2 GETTING STARTED

### Introduction

This quickstart guide will help you to get started with your qIDmini (Model R1170I) reader.

The qIDmini R1170I has two communication interfaces: USB and Bluetooth. The last one is the preferred communication interface using the SPP profile (Serial Port Profile).

After powering on the reader, the Bluetooth interface is available to accept incoming connection requests (discoverable) from Bluetooth enabled hosts like PCs, PDAs, Tablets, Smartphones and so on.

In the § *QIDMINI CONFIGURATION MENU* page 54 you can choose between three different profile options:

- **EASY2RD** (factory default): choosing this option you select the CAEN RFID easy2read communication protocol. Select this option in order to control the reader using the [CAEN RFID Easy Controller Application](#) or the [SDK \(Software Development Kits\)](#) library. For details on the use with the EASY2RD profile please refer to § *QIDMINI EASY2RD PROFILE* chapter page 19.
- **HID**<sup>4</sup>: choosing this option you select the keyboard emulation protocol. For details on the use on the HID profile please refer to § *QIDMINI HID PROFILE* chapter page 34.
- **OFFLINE**: choosing this option you select the *stand-alone mode*. For details on the use on the OFFLINE profile please refer to § *qIDmini OFFLINE PROFILE* chapter page 45.
- **BUFFER**: choosing this option you select the *buffered read mode*. For details on the use on the BUFFER profile please refer to § *qIDmini BUFFER PROFILE* chapter page 47.

The reader is sold with the factory profile set to EASY2RD. This guide helps you to getting started with your reader using the EASY2RD profile.


### Bluetooth Communication Setup using the Easy Controller for Android

1. Download the *CAEN RFID Easy Controller for Android App* from the [qIDmini R1170I web page](#), by clicking on the Android APP on Google Play icon.
2. Launch the *CAEN RFID Easy Controller for Android App*.


---

<sup>4</sup> HID profile is not available for qIDmini R1170I with APPLE profile (ordering options: WR1170IEAPLP, WR1170IUAPLP, WR1170IDKEAP, WR1170IDKUAP)


3. Click on “Add reader”:

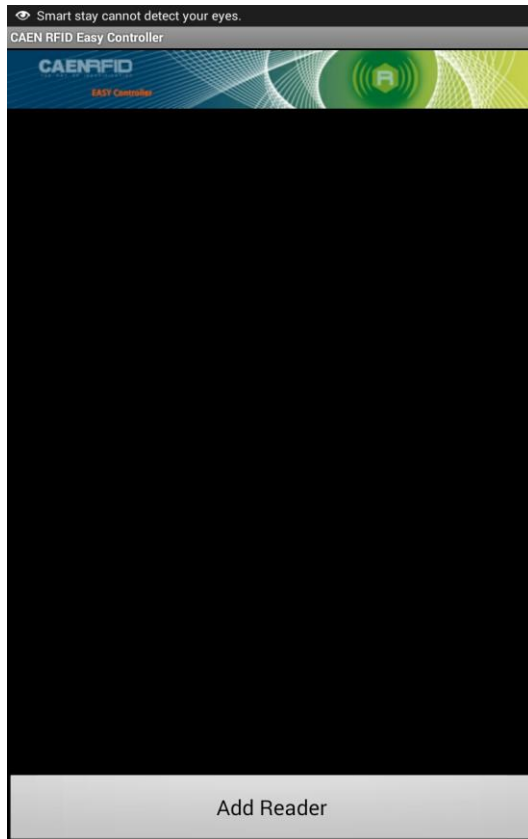


4. Click on “Bluetooth” in the “Connection Type” window:

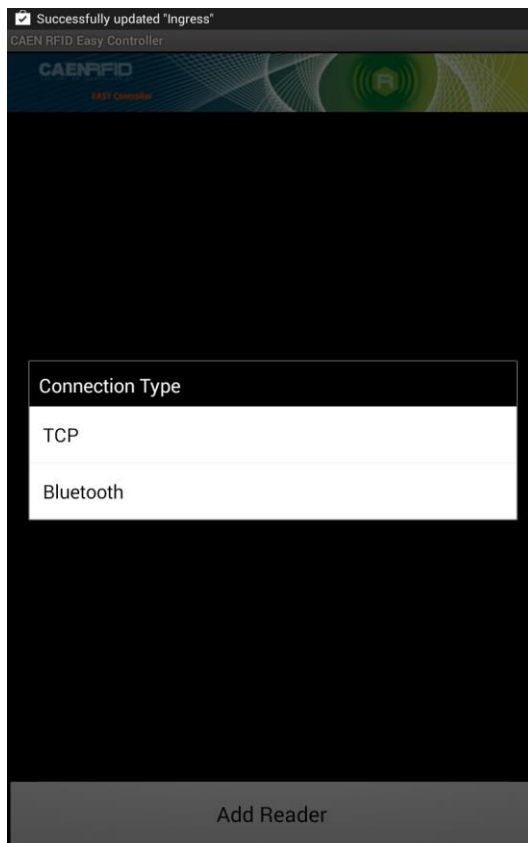

- Click on “yes” to confirm the *Bluetooth permission request*:

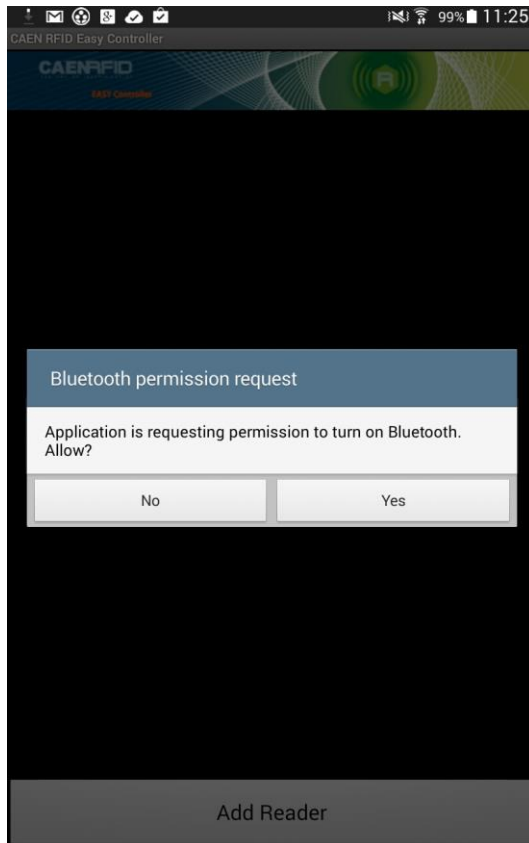


- Select the qIDmini R1170I reader from the list of Bluetooth devices:

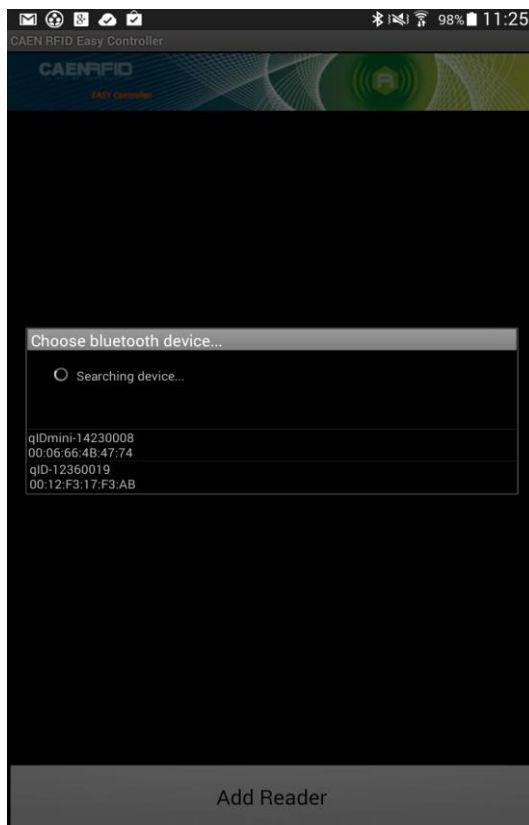





7. Confirm the passkey:

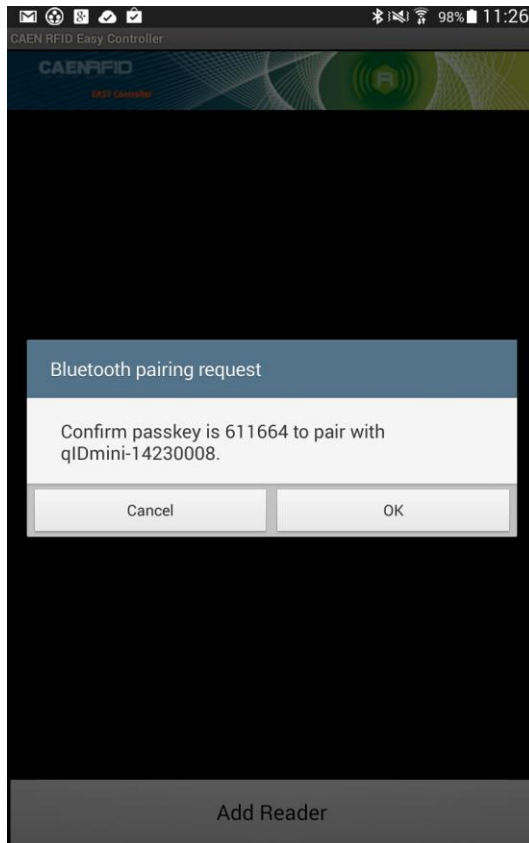


8. Once the connection is established the Bluetooth blue light turns on.
9. To start using your qIDmini R1170I, click on the reader line:

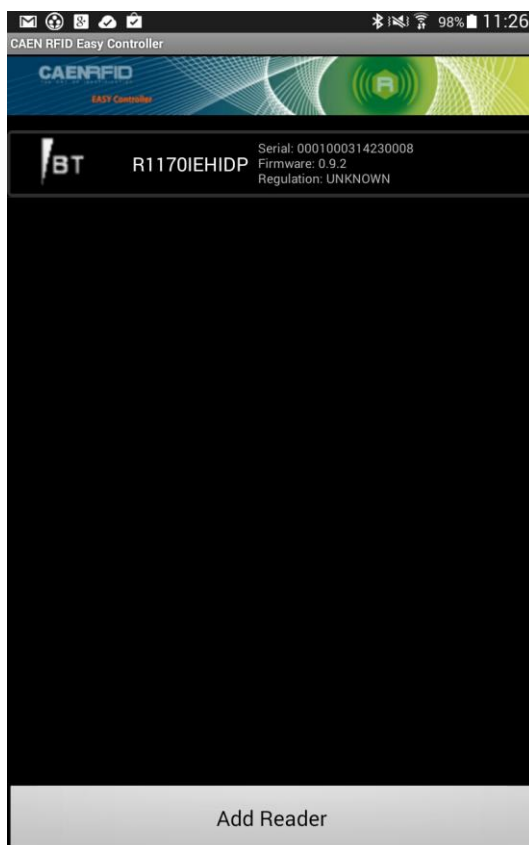

10. Click on “Start Inventory”:

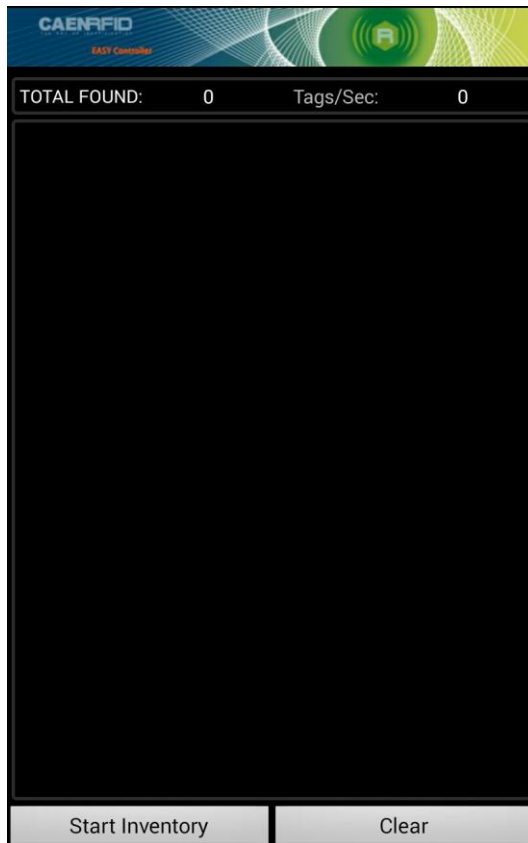

11. A list of the read tags is shown:

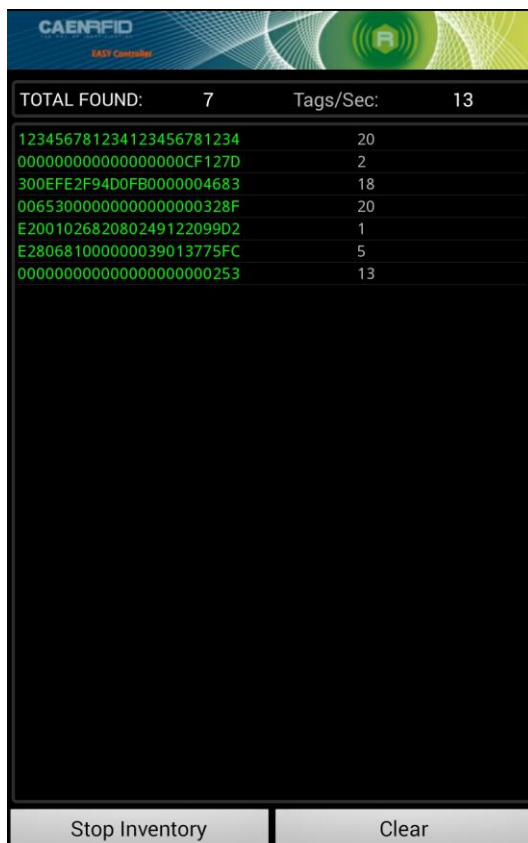

## 3 qIDmini EASY2RD PROFILE

### Introduction

Choosing the **EASY2RD** profile option you select the CAEN RFID easy2read communication protocol. Select this option in order to control the reader using the [CAEN RFID Easy Controller Application](#) or the [SDK \(Software Development Kits\)](#) library.

For details on the available profiles and on the activation method please refer to § *PROFILE* paragraph page 56.

Note that the **APPLE** model reader (see § *Ordering Options* page 13) can be connected to all devices using the EASY2RD profile, while the **HID** model reader can be connected through the EASY2RD profile to all devices except the iOS ones.

In the following table it is shown the compatibility between the Apple/HID models and different Operating Systems (Android, PC and iOS) in the EASY2RD profile:

	ANDROID	PC	iOS
APPLE MODEL <sup>5</sup>	√	√	√
HID MODEL <sup>6</sup>	√	√	-

Tab. 3.1: Compatibility table between the Apple/HID models and different OS in the EASY2RD profile

### EASY2READ profile options

To enter the EASY2READ profile options, turn on the reader; the display shows information on the currently active profile (EASY2READ) and then the message "ready" informs you that the reader is operating. Press quickly the *power* button to enter the EASY2READ profile options:

- DISPLAY

#### DISPLAY

Hold down the trigger button to enter the *Display* Option:

- CONTROL. Hold down the trigger button to enter the CONTROL options:
  - LOCAL: the qIDmini display shows the EPC of the read tags and the date and time if enabled in the clock menu.
  - REMOTE: the display is controlled by a PC, a smartphone etc.. using the function *PrintScreen* . So with this option you can customize the information displayed by the reader about the read tags (e.g., instead of the EPC you can display messages such as "correct tag"....).

Use the function *PrintScreen* (for more information, visit the [CAEN RFID SDK Software Development Kit](#) web page and download the *CAEN RFID API Reference Manual*) to customize the information displayed by the reader:

*C# representation:*

```
public void PrintScreen(
    string Text,
    string TerminalType
)
```

<sup>5</sup> APPLE Model Ordering Options: WR1170IEAPLP, WR1170IUAPLP, WR1170IDKEAP, WR1170IDKUAP

<sup>6</sup> HID Model Ordering Options: WR1170IEHIDP, WR1170IUHIDP, WR1170IDKEHI, WR1170IDKUHI, WR1170IENFHP, WR1170IUNFHP

Parameters:

Name	Description
Text	An arbitrary ASCII string.
TerminalType	RFU parameter, default is 0 (VT100).

The currently active CONTROL is marked with an asterisk. By default the LOCAL CONTROL is enabled.


To activate a different CONTROL, scroll through the CONTROL options by pressing quickly the trigger button until LOCAL or REMOTE is displayed. Hold down the trigger button for a few seconds: the name of the chosen option will begin to flash. Once activated, the device returns to the main menu.

The currently active state is marked with an asterisk. By default the CONTROL is set to LOCAL.


## Android devices

### Bluetooth Communication Setup using the Easy Controller for Android


1. Download the *CAEN RFID Easy Controller for Android App* from the [qIDmini R1170I web page](#), by clicking on the Android App on Google Play icon.
2. Launch the *CAEN RFID Easy Controller for Android App*.
3. Click on “Add reader”:

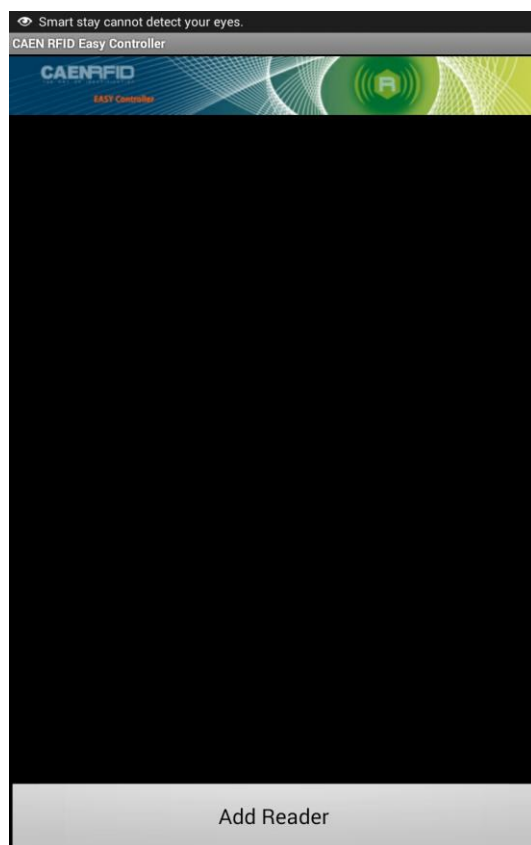


4. Click on “Bluetooth” in the “Connection Type” window:

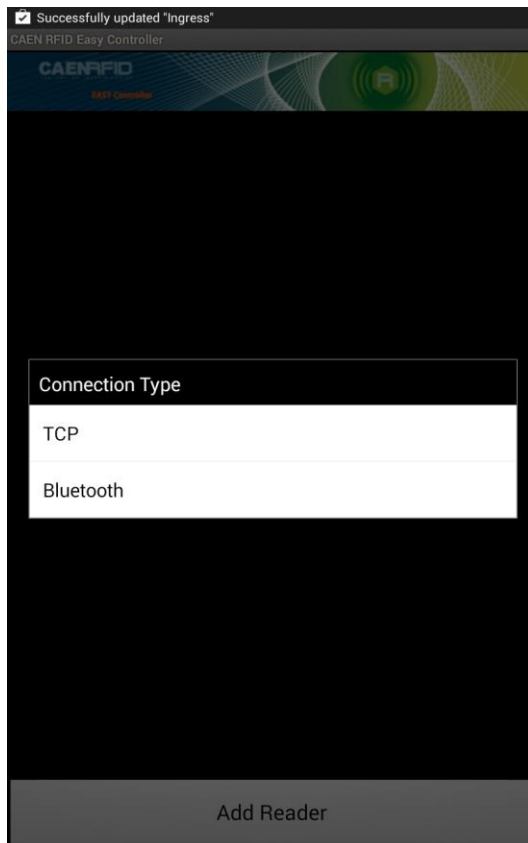


5. Click on “yes” to confirm the *Bluetooth permission request*:

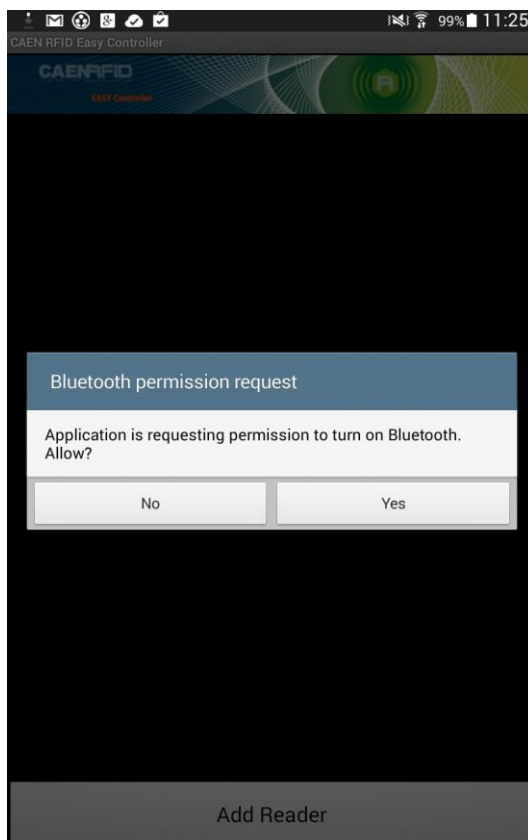


6. Select the qIDmini R1170I reader from the list of Bluetooth devices:

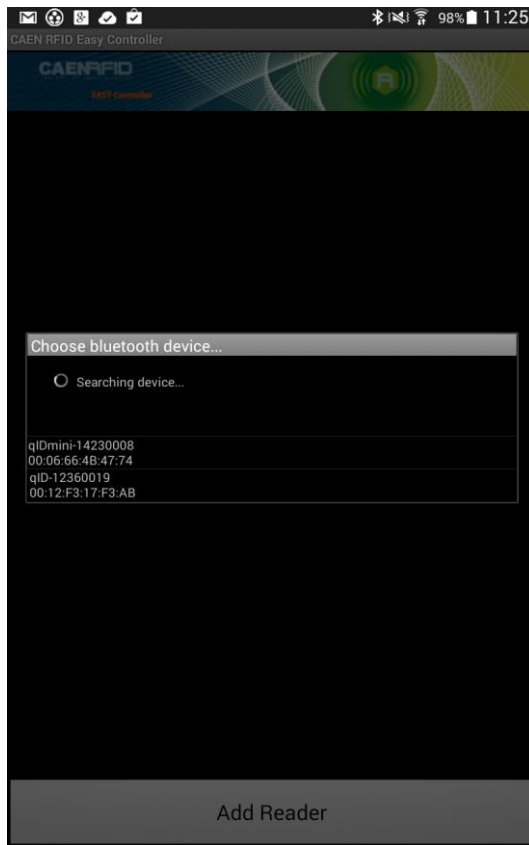


7. Confirm the passkey:

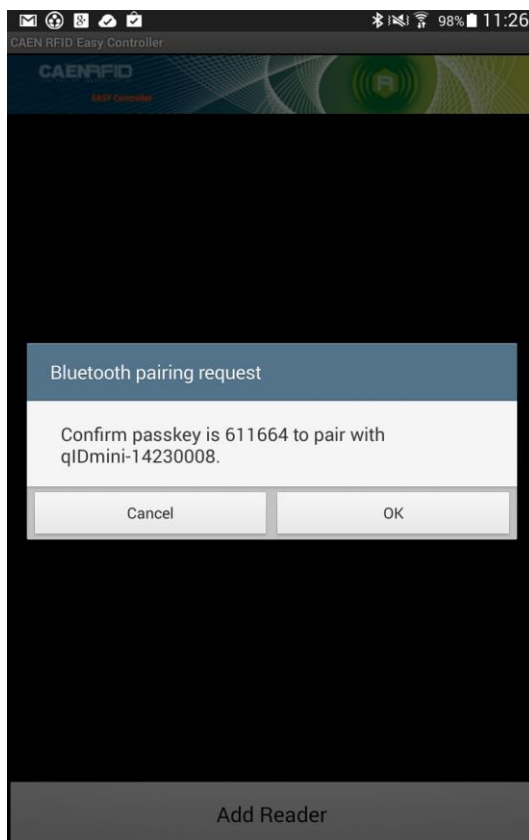


8. Once the connection is established the Bluetooth blue light turns on.
9. To start using your qIDmini R1170I, click on the reader line:

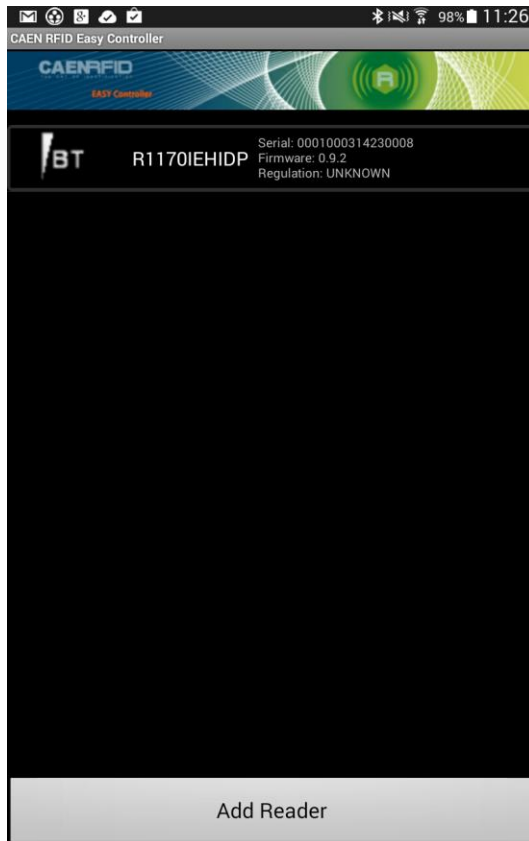

10. Click on "Start Inventory":

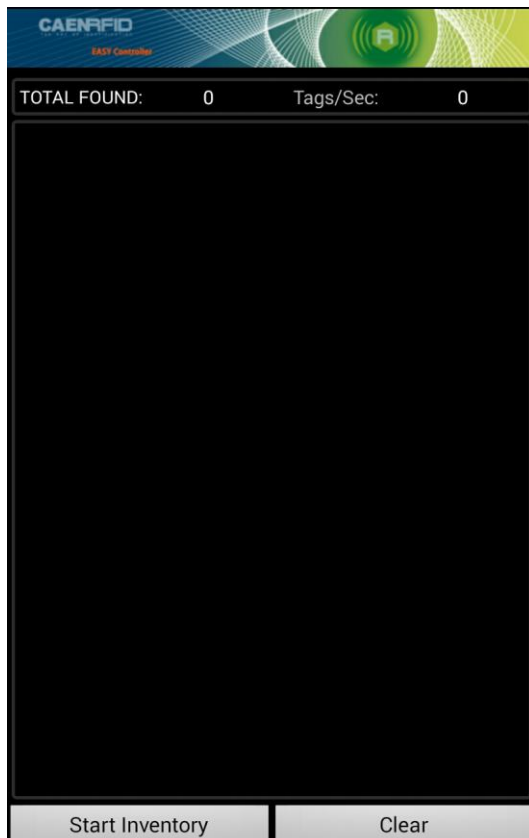

11. A list of the read tags is shown:

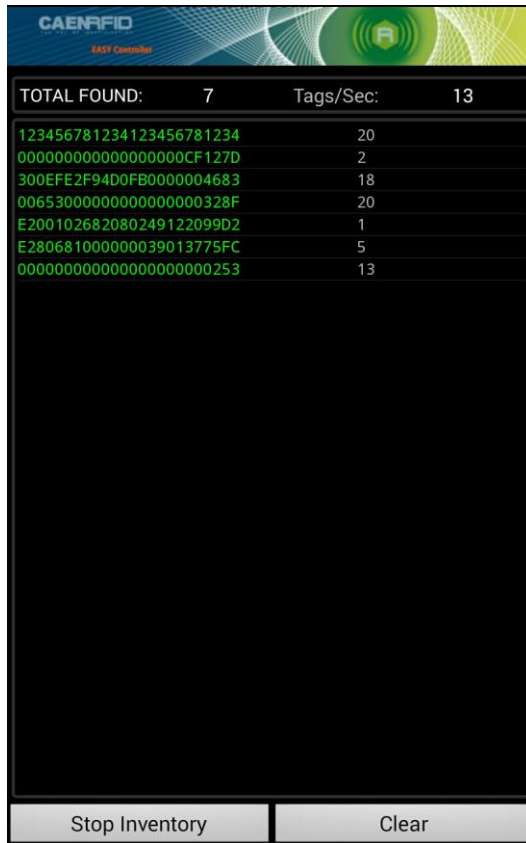

TOTAL FOUND: 7		Tags/Sec: 13
123456781234123456781234	20	
0000000000000000CF127D	2	
300EFE2F94D0FB0000004683	18	
0065300000000000000328F	20	
E200102682080249122099D2	1	
E280681000000039013775FC	5	
000000000000000000000253	13	

Stop Inventory      Clear




## Windows PCs


### Bluetooth Communication Setup

1. In case of Windows 8 Operating System:


Right click on the *Bluetooth* icon in the taskbar -> *Add a Bluetooth Device*:

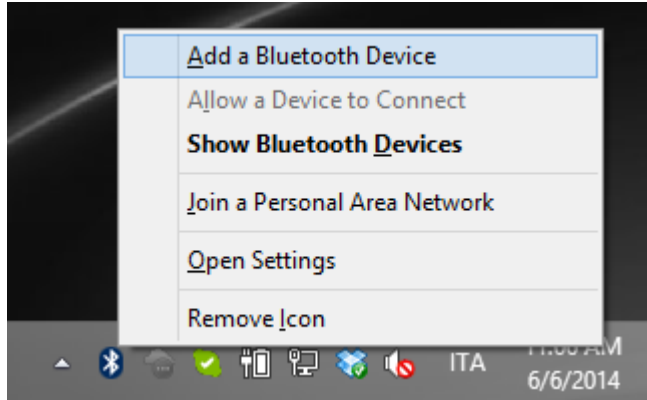

Select the qID mini R1170I reader and click on “Pair”:

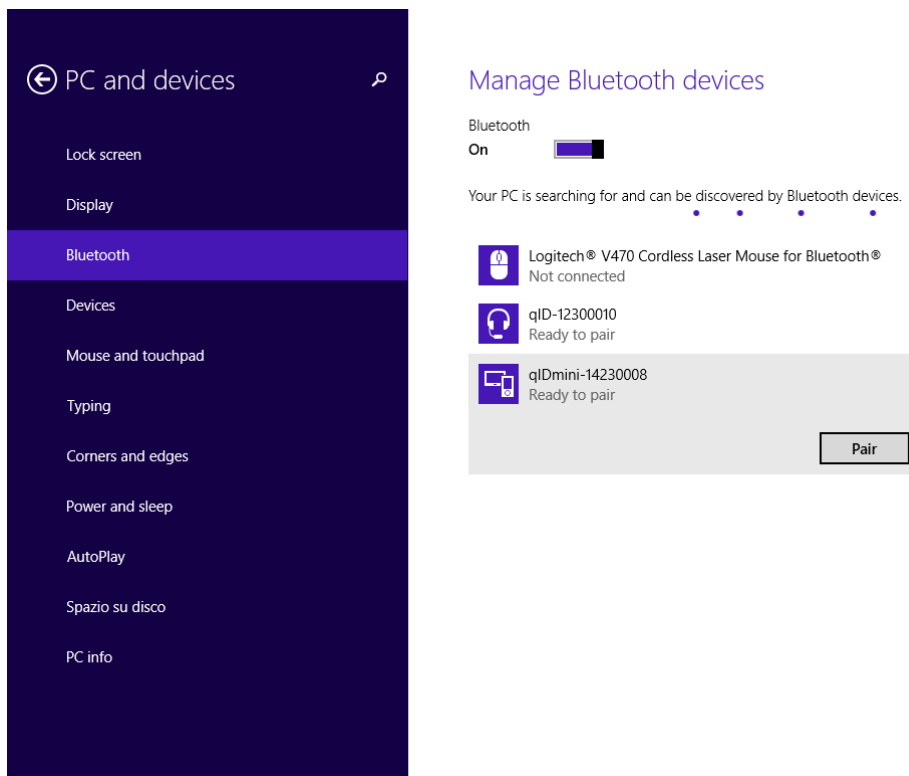

Click on “yes” to confirm the passcode:

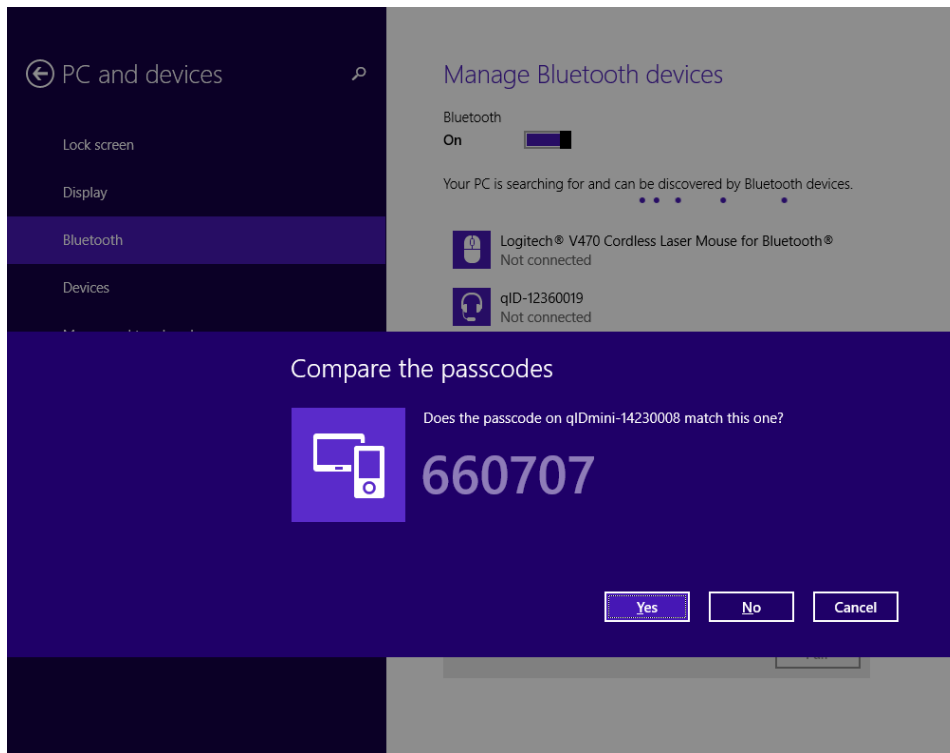

**In case of Windows XP Operating System**, when discovered by the host, the qIDmini reader can be identified by its Bluetooth device name and paired using the pass-key; both parameters are provided below:

- Bluetooth device name: “qIDmini” + device serial number
  - Pass-key: 1234
2. Once the connection is established the Bluetooth blue light turns on.

Now you can use the [CAEN RFID Easy Controller](#) Application to control the reader. For details refer to § *Connecting the qIDmini using the Easy Controller for Windows* page 29.




**Warning:** Note that in the EASY2RD profile holding down the *trigger* button activates the tag inventory only if the continuous mode is active (see the function *EventInventoryTag Method* in the *CAEN RFID API Reference Manual* that can be download from [qIDmini R1170I web page](#), *Documents* section).


## USB Communication Setup

The qIDmini reader can be connected to a PC using the provided USB cable and it is detected by the PC as an emulated serial port. In order to correctly operate with the reader you need to install a driver.

1. Power OFF the reader, plug the USB cable into the qIDmini USB port and then power ON the reader again.
2. In order to connect the qIDmini reader to the PC you need to install the VCP (Virtual Com Port) drivers for your operating system. You can download VCP drivers for Windows based systems from the CAEN RFID Web Site from the [qIDmini R1170I web page](#), SW/FW section or from the [Software and Firmware download area](#).
3. Open the System properties: go to *Control Panel* → *All Control Panel Items* → *System* and click on *Device Manager*.

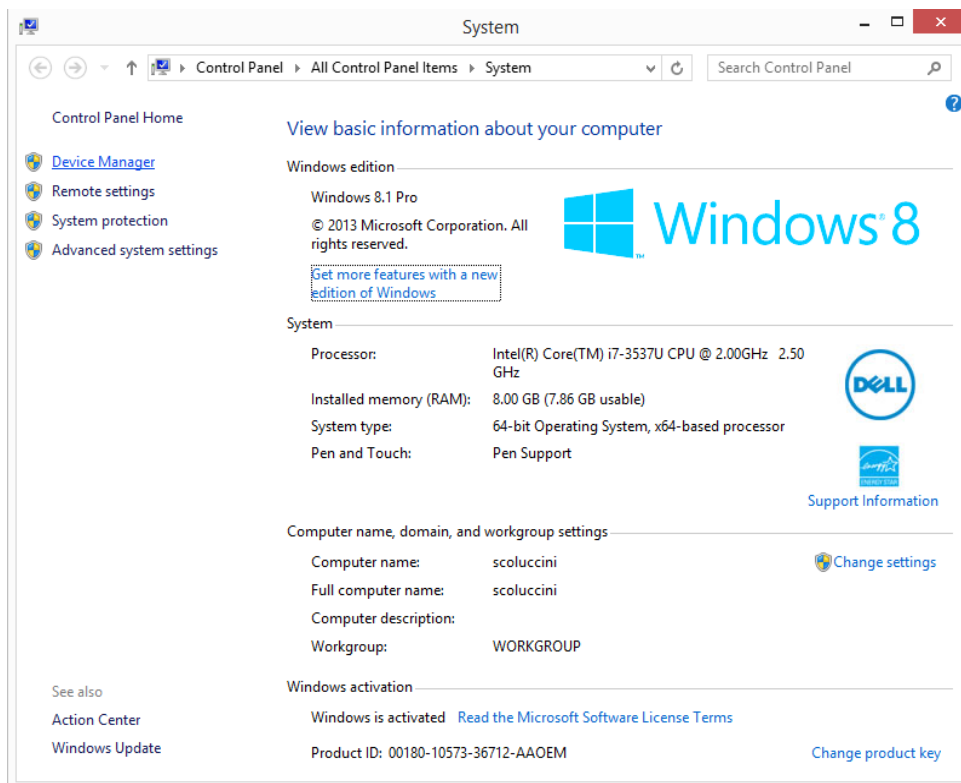

4. After having installed the driver, the reader is detected by the PC as an emulated serial port (VCP):

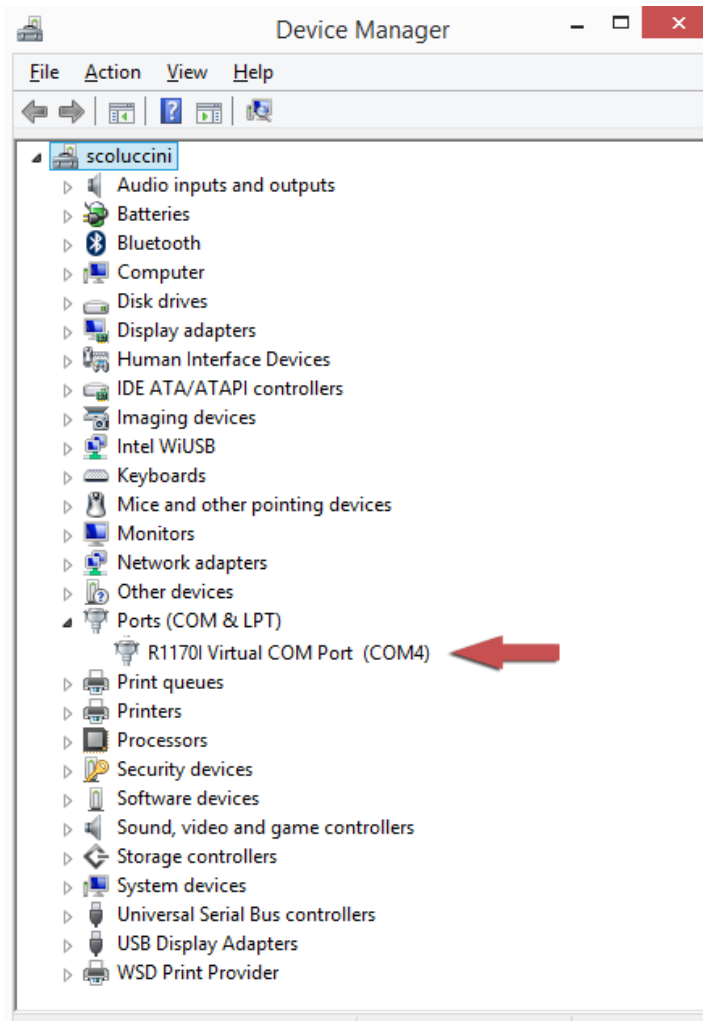

Now you can use the [CAEN RFID Easy Controller](#) Application to control the reader. For details refer to § *Connecting the qIDmini using the Easy Controller for Windows* page 29.



**Warning:** Note that in the EASY2RD profile holding down the *trigger* button activates the tag inventory only if the continuous mode is active (see the function *EventInventoryTag Method* in the *CAEN RFID API Reference Manual* that can be download from [qIDmini R1170I web page](#), *Documents* section).


## Connecting the qIDmini using the Easy Controller for Windows

Both USB and Bluetooth interface creates virtual COM ports on the host PC that can be used to connect to the reader with the CAEN RFID Easy Controller application.


The activation of the EASY2RD profile is required to connect the qIDmini using the Easy Controller application for Windows.

Follow the steps below to connect the qIDmini reader using the Easy Controller for Windows via Bluetooth:

1. Download from the CAEN RFID web site the latest version of the CAEN RFID [Easy Controller for Windows](#) software and install it.
2. Connect the qIDmini reader to your PC using either the USB or the Bluetooth connection.
3. Right click on the *Bluetooth* icon in the taskbar -> *Open Settings*:

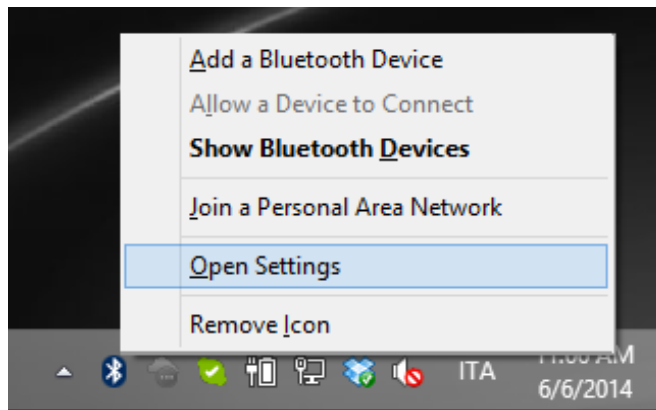

4. Look for the emulated serial port in the “Bluetooth Settings”:

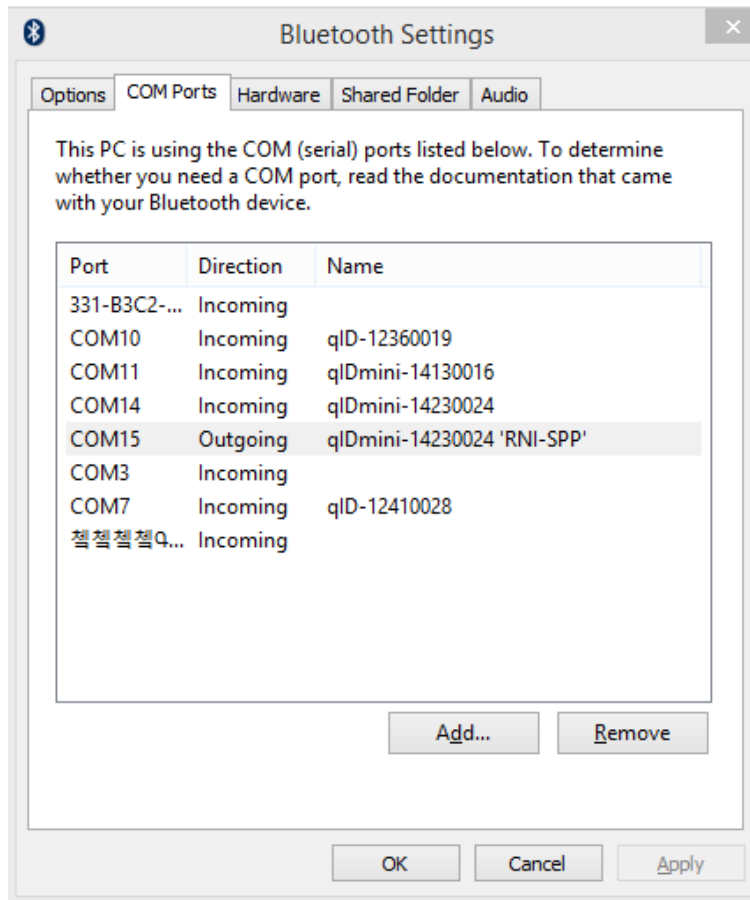

5. Launch the CAEN RFID Easy Controller application.
6. On the main application window click on *File* → *Connect*; the connection dialog box will appear.
7. Select *RS232* from the *Connection Type* combo box and the right COM port number from the *RS232 Port* combo box.
8. Click on *Connect*.
9. Place a tag in front of the reader and click on *Start Inventory* to see the tag information displayed on the main window.


For more information on the CAEN RFID *Easy Controller for Windows* application usage, please refer to the relevant user manual: you can download it from the [qIDmini R1170I web page, Documents Section](#), from the CAEN RFID [Easy Controller for Windows](#) web page or in the [Manual and Documents](#) web area.

A CAEN RFID *Easy Controller for Android* application is also available. For more information please refer to the CAEN RFID [Easy Controller for Android](#) web page.


## iOS devices

### Bluetooth Communication Setup


1. On your iOS device, go to Setting and enable the Bluetooth:

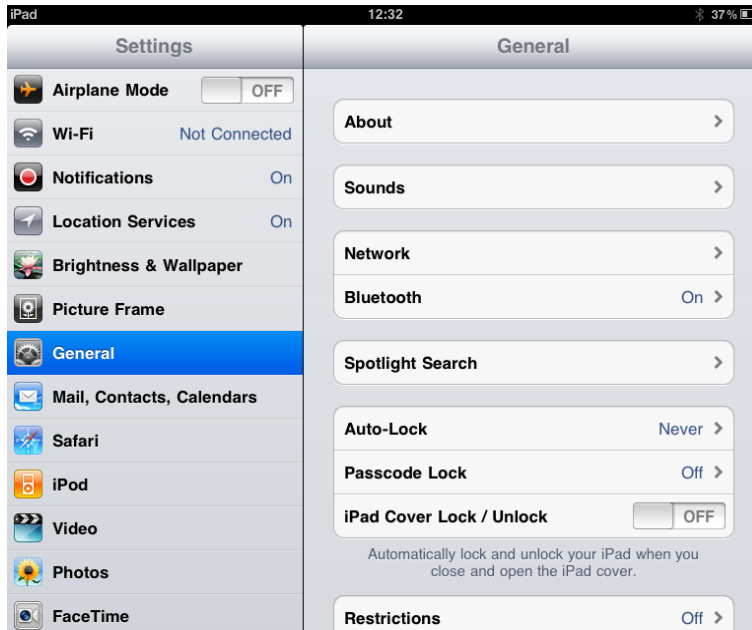

2. A list of the Bluetooth available devices is shown:

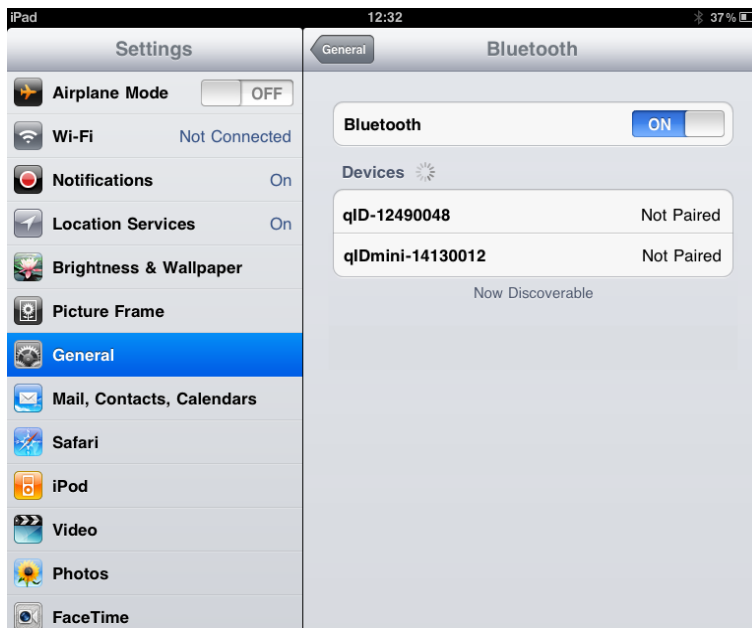

- Click on the qIDmini R1170I reader and wait while the pairing is completed:

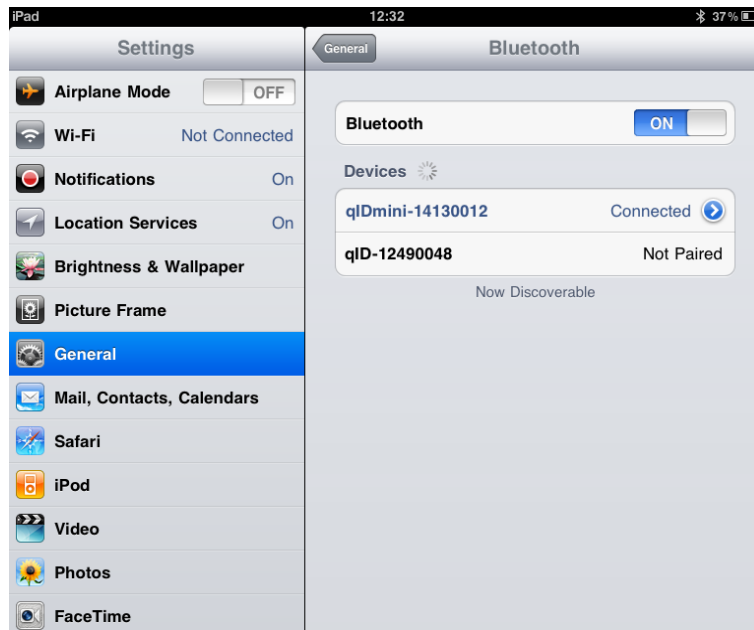

- Once the connection is established the Bluetooth blue light turns on.
- Download the *CAEN RFID qID Start App* from the [qIDmini R1170I web page](#), by clicking on the App Store icon.
- Launch the *qID Start App*:





7. Now you can start the tag inventory just clicking on  button. You can see the EPC of the tags displayed on the screen:



## 4 qIDmini HID PROFILE

### Introduction

Choosing the **HID** profile option you select the keyboard emulation protocol.

For details on the available profiles and on the activation method please refer to § *PROFILE* paragraph page 56.

Note that the **APPLE** model reader (see § *Ordering Options* page 13) does not implement the Bluetooth *HID profile*, while the **HID** model reader can be connected through the *HID profile* to all the devices, including the iOS ones.

In the following table it is shown the compatibility between the Apple/HID models and different Operating Systems (Android, PC and iOS) in the HID profile:

	ANDROID	PC	iOS
APPLE MODEL <sup>7</sup>	-	-	-
HID MODEL <sup>8</sup>	√	√	√

Tab. 4.1: Compatibility table between the Apple/HID models and different OS in the HID profile

### HID profile options

To enter the HID profile options, turn on the reader, the display shows information on the currently active profile (HID) and then the message "ready" informs you that the reader is operating. Press quickly the *power* button to enter the HID profile options:

- FORMAT
- DISPLAY
- APPLEKB
- PREFIX
- SUFFIX
- KBOARD

#### FORMAT

In the HID profile you can set different EPC format, while using the EASY2READ profile it is not possible to change the HEXADECIMAL EPC format.

- **HEX:** The RFID EPC string is represented by 24 characters
- **ASCII:** The RFID EPC string (96 bits long) is represented by 12 characters

The currently active format is marked with an asterisk. By default the EPC HID format is set to "HEX".

To activate a different format, scroll through the FORMAT options by pressing quickly the *trigger* button until HEX or ASCII is displayed. Hold down the *trigger* button for a few seconds, the chosen option will begin to flash. Once activated, the device returns to the main menu.

<sup>7</sup> APPLE Model Ordering Options: WR1170IEAPLP, WR1170IUAPLP, WR1170IDKEAP, WR1170IDKUAP

<sup>8</sup> HID Model Ordering Options: WR1170IEHIDP, WR1170IUHIDP, WR1170IDKEHI, WR1170IDKUHI, WR1170IENFHP, WR1170IUNFHP

## DISPLAY

Hold down the trigger button to enter the Display Option:

1. SCROLL:.. Flowing text on display.To enable/disable the display scroll, hold down the *trigger* button for a few seconds. The chosen option will begin to flash. Once activated, the device returns to the main menu.

The currently active state is marked with an asterisk. By default the display scroll is enabled and the flowing text on the display shows the whole EPC of the tag.

If the display scroll is disabled, the display shows the last 8 characters of the tag EPC.

## APPLEKB

Hold down the trigger button to send a request to iOS devices in the read range of the qiDmini reader to open the virtual keyboard on the iOS device.

## PREFIX

The prefix permits to insert before the EPC of the read tag an affix of max 7 digits length .

The following list shows the accepted characters for the prefix:

```
'a', 'b', 'c', 'd', 'e', 'f', 'g', 'h', 'i', 'j', 'k', 'l', 'm', 'n', 'o', 'p', 'q', 'r', 's', 't', 'u', 'v', 'w', 'x', 'y', 'z', 'A', 'B', 'C', 'D', 'E', 'F', 'G', 'H', 'I', 'J', 'K', 'L', 'M', 'N', 'O', 'P', 'Q', 'R', 'S', 'T', 'U', 'V', 'W', 'X', 'Y', 'Z', '0', '1', '2', '3', '4', '5', '6', '7', '8', '9', '{', '|', '}', '!', '"', '#', '$', '&', '(', ')', '*', '+', ',', '.', '/', ':', ';', '<', '=', '>', '?', '@', '[', ']', '^', '_', '-'
```

By default the prefix string is empty. To set the prefix, hold down the *trigger* button for a few seconds. The prefix string empty is shown. Press quickly the *trigger* button to change the *first* value. Then hold down the *trigger* button to save the first value. Press quickly the *trigger* button to change the *second* value. Then hold down the *trigger* button to save the second value and so on until the seventh digit. Then press quickly the power button to fix the prefix string and then hold down the trigger button to save it. The prefix begins to flash and the reader returns to the main menu. It is possible to insert a shorter prefix string.

To return to the main menu, quickly press the *power* button.

To restore the empty string, go to prefix option and hold down the trigger button. The current active prefix is shown. Press quickly the trigger button to restore the empty string. Then press quickly the power button to fix the prefix string and then hold down the trigger button to save it.

## SUFFIX

The suffix permits to insert after the EPC of the read tag an affix of max 7 digits length .

The following list shows the accepted characters for the suffix:

```
'a', 'b', 'c', 'd', 'e', 'f', 'g', 'h', 'i', 'j', 'k', 'l', 'm', 'n', 'o', 'p', 'q', 'r', 's', 't', 'u', 'v', 'w', 'x', 'y', 'z', 'A', 'B', 'C', 'D', 'E', 'F', 'G', 'H', 'I', 'J', 'K', 'L', 'M', 'N', 'O', 'P', 'Q', 'R', 'S', 'T', 'U', 'V', 'W', 'X', 'Y', 'Z', '0', '1', '2', '3', '4', '5', '6', '7', '8', '9', '{', '|', '}', '!', '"', '#', '$', '&', '(', ')', '*', '+', ',', '.', '/', ':', ';', '<', '=', '>', '?', '@', '[', ']', '^', '_', '-'
```

By default the suffix string is empty. To set the suffix, hold down the *trigger* button for a few seconds. The suffix string empty is shown. Press quickly the *trigger* button to change the *first* value. Then hold down the *trigger* button to save the first value. Press quickly the *trigger* button to change the *second* value. Then hold down the *trigger* button to save the second value and so on until the seventh digit. Then press quickly the power button to fix the suffix string and then hold down the trigger button to save it. The suffix begins to flash and the reader returns to the main menu. It is possible to insert a shorter suffix string.

To return to the main menu, quickly press the *power* button.

To restore the empty string, go to suffix option and hold down the trigger button. The current active suffix is shown. Press quickly the trigger button to restore the empty string. Then press quickly the power button to fix the suffix string and then hold down the trigger button to save it.

## KBOARD

The *KBOARD* options are the following:

- **QWERTY**: standard keyboard.
- **AZERTY**: French keyboard

The currently active keyboard is marked with an asterisk. By default the *KBOARD* is set to “QWERTY”.


To set a different keyboard, press quickly the trigger button until the desired value and then hold down the trigger button.

To activate a different keyboard, scroll through the *KBOARD* options by pressing quickly the *trigger* button until QWERTY or AZERTY is displayed. Hold down the *trigger* button for a few seconds, the chosen option will begin to flash. Once activated, the device returns to the main menu.


## Android devices

### Bluetooth Communication Setup


1. On your Android device, go to *Setting* and enable the Bluetooth. A list of the Bluetooth available devices is shown:

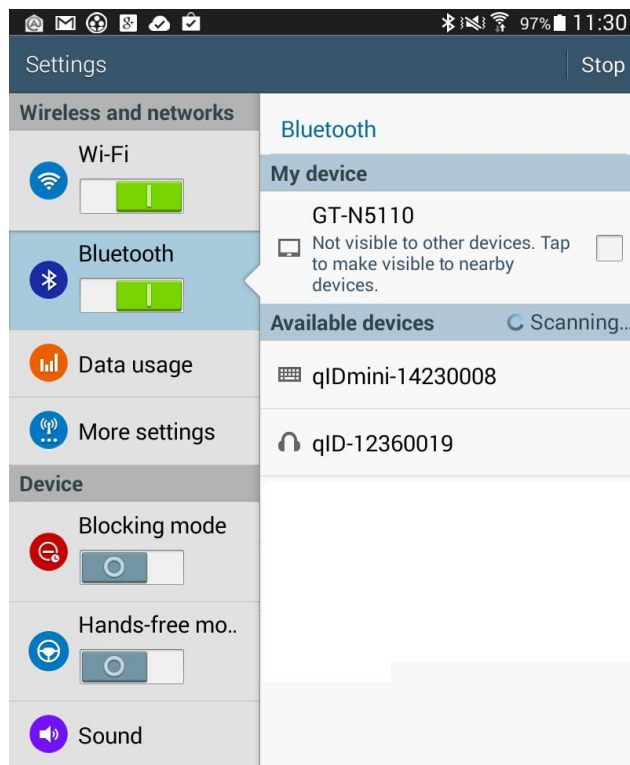

2. Click on the qIDmini R1170I reader and wait while the pairing is completed:

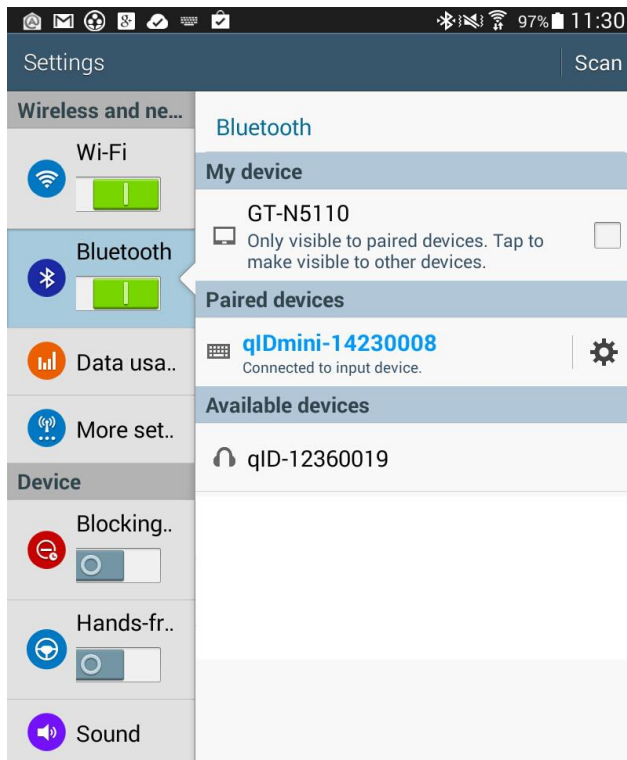

3. Once the connection is established the Bluetooth blue light turns on.
4. Launch a text editing App (or any other App accepting keyboard input).
5. Start an inventory cycle by pressing the *trigger* button.
6. On the text editing App window you will see the EPCs of the tags:

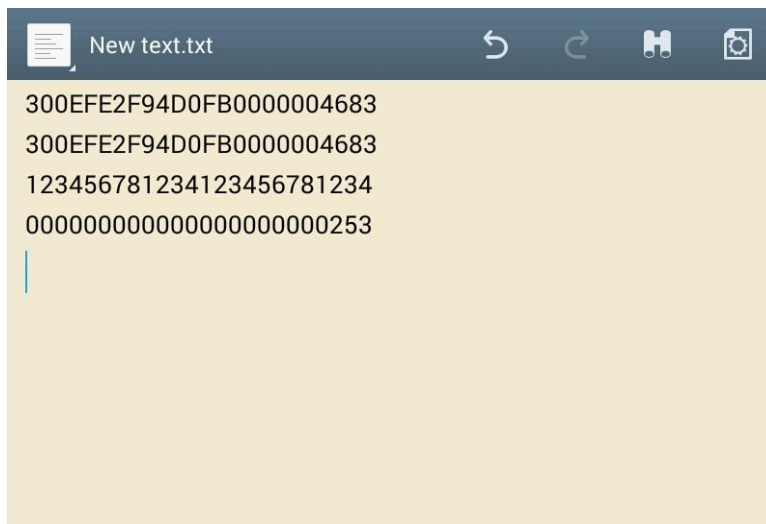


Note that, when configured in HID profile and paired to a device, the qIDmini will automatically reconnect to the same device every time the Bluetooth link is active (qIDmini switched ON and Bluetooth activated on the host). You can verify this behaviour looking at the blue LED that, in this case, turns ON automatically as soon as you switch on the qIDmini.

## Windows PCs


### Bluetooth Communication Setup

1. In case of Windows 8 Operating System:


Right click on the Bluetooth icon in the taskbar -> *Add a Bluetooth Device*:

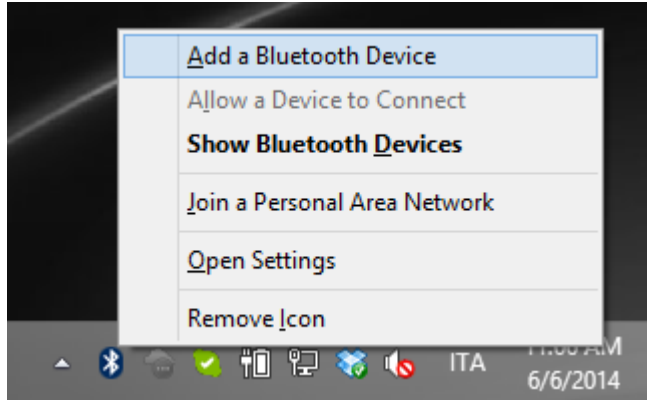

Select the qID mini R1170I reader and click on "Pair":

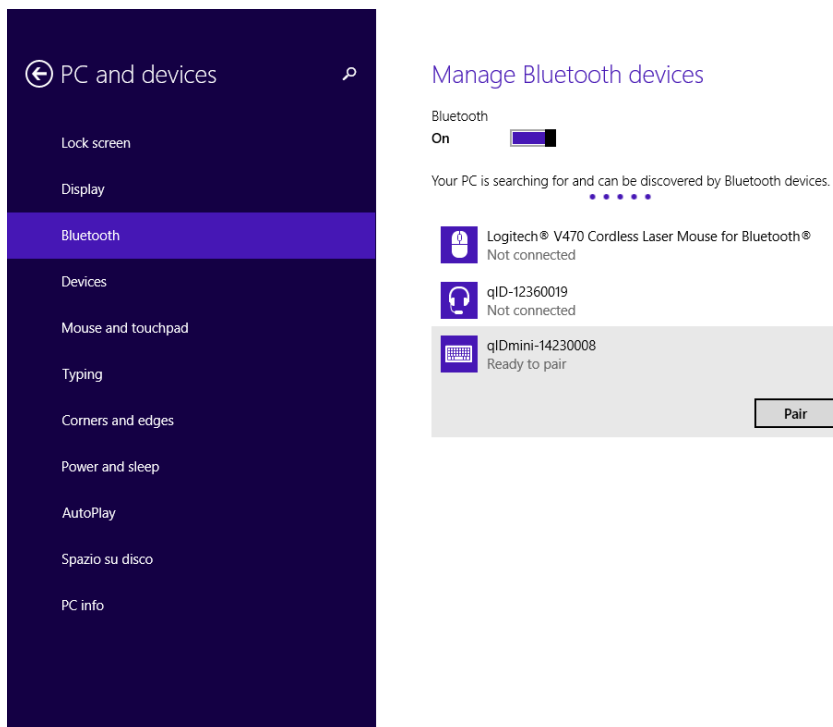


Click on “yes” to confirm the passcode:

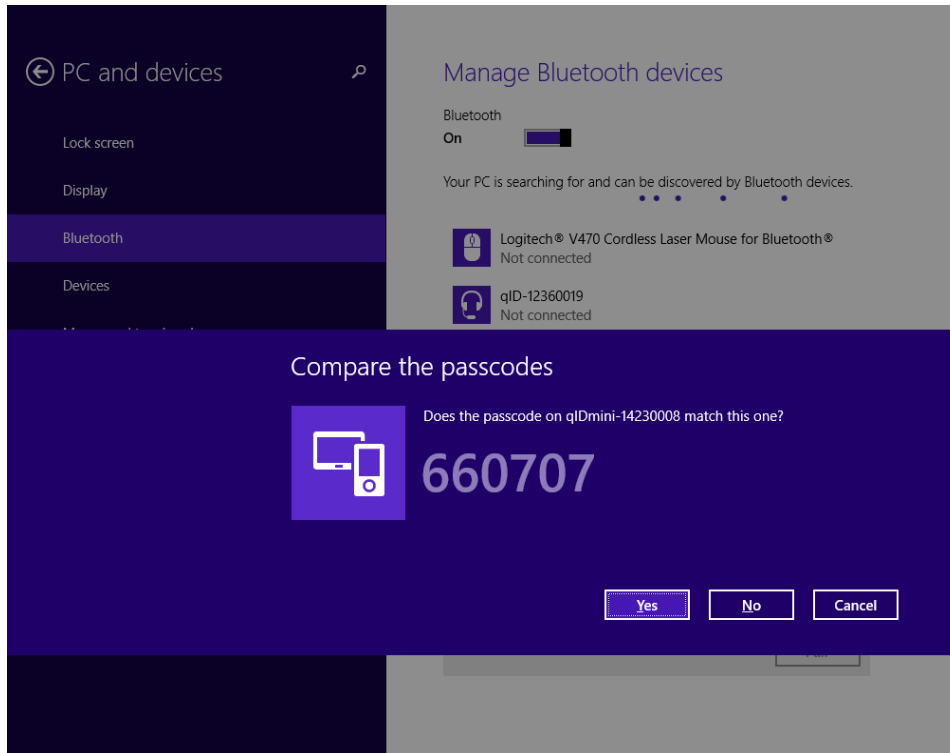


**In case of Windows XP Operating System**, when discovered by the host, the qIDmini reader can be identified by its Bluetooth device name and paired using the pass-key; both parameters are provided below:

- Bluetooth device name: “qIDmini” + device serial number
  - Pass-key: 1234
2. Once the connection is established the Bluetooth blue light turns on.
  3. Launch a text editing App (or any other App accepting keyboard input).
  4. Start an inventory cycle by pressing the *trigger* button.
  5. On the text editing window you will see the EPCs of the tags:

Example with a .txt file:

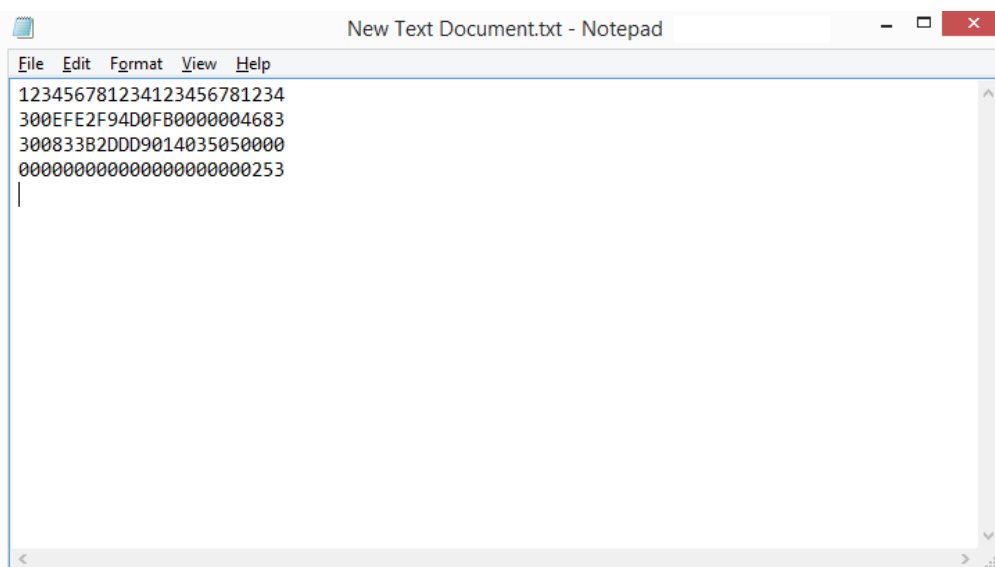

Example with Microsoft Excel:

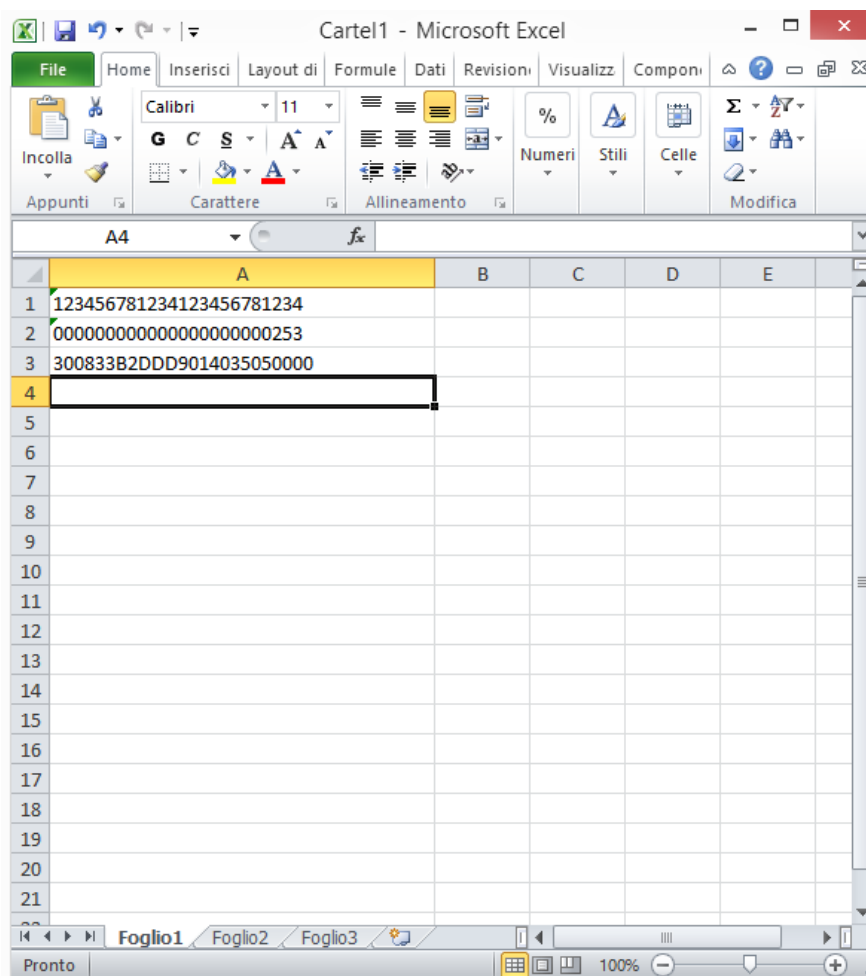


Note that, when configured in HID profile and paired to a device, the qIDmini will automatically reconnect to the same device every time the Bluetooth link is active (qIDmini switched ON and Bluetooth activated on the host). You can verify this behaviour looking at the blue LED that, in this case, turns ON automatically as soon as you switch on the qIDmini.




## USB Communication Setup

The qIDmini reader can be connected to a PC using the provided USB cable and it is detected by the PC as an emulated serial port. In order to correctly operate with the reader you need to install a driver.

1. Power OFF the reader, plug the USB cable into the qIDmini USB port and then power ON the reader again.
2. In order to connect the qIDmini reader to the PC you need to install the VCP (Virtual Com Port) drivers for your operating system. You can download VCP drivers for Windows based systems from the CAEN RFID Web Site from the [qIDmini R1170I web page](#), SW/FW section or from the [Software and Firmware download area](#).
3. Open the System properties (right click on *My computer* icon) → *All Control Panel Items* → *System* and click on *Device Manager*.

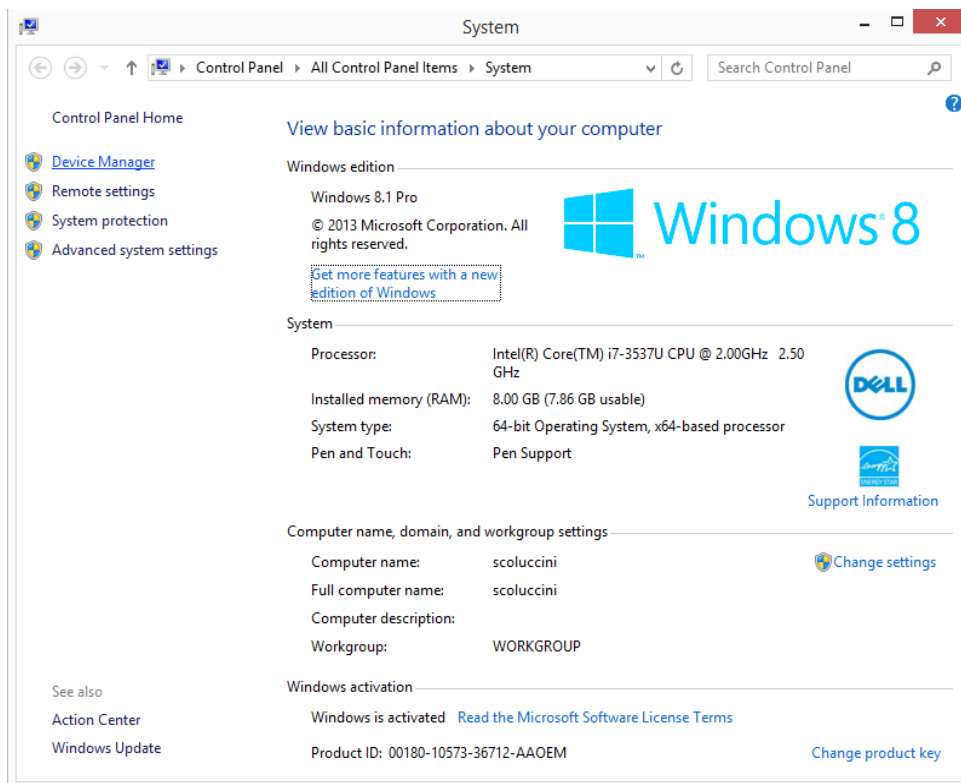

4. After having installed the driver, the reader is detected by the PC as an emulated serial port (VCP):

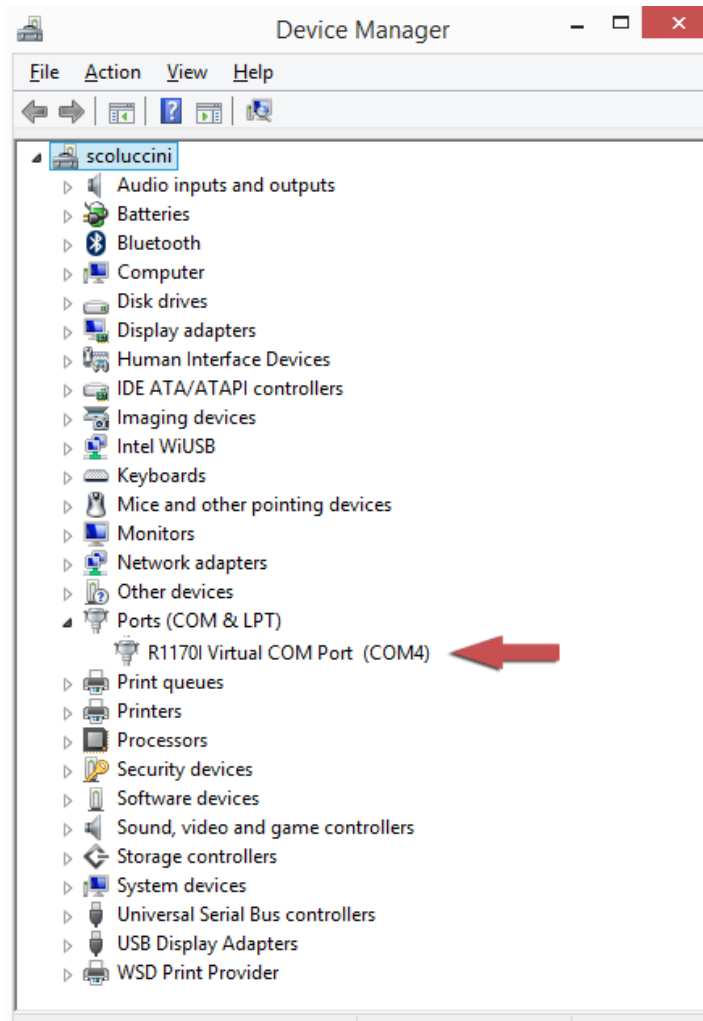

**Warning:** Note that, when configured in the HID profile, the qIDmini reader cannot be controlled using the *CAEN RFID Easy Controller Application*.


The qIDmini reader, when configured in the HID profile and connected via USB to a PC, sends the EPCs of the detected tags on the serial port as ASCII characters. So, in order to operate with the reader in this configuration, follow these steps:

1. Launch a terminal emulator application (e.g Hyperterminal)
2. Connect the terminal emulator application to the virtual COM port assigned to the qIDmini reader
3. Press the *trigger* button to perform an inventory cycle (hold down the button to repeat inventory cycles)
4. The EPCs are displayed on the terminal emulator window


## iOS devices

### Bluetooth Communication Setup


1. On your iOS device, go to *Setting* and enable the Bluetooth:

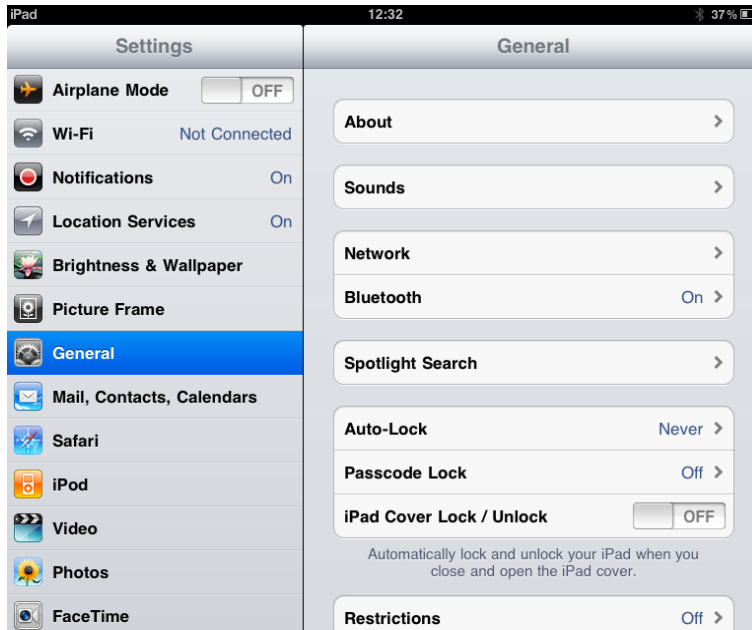


2. A list of the Bluetooth available devices is shown:

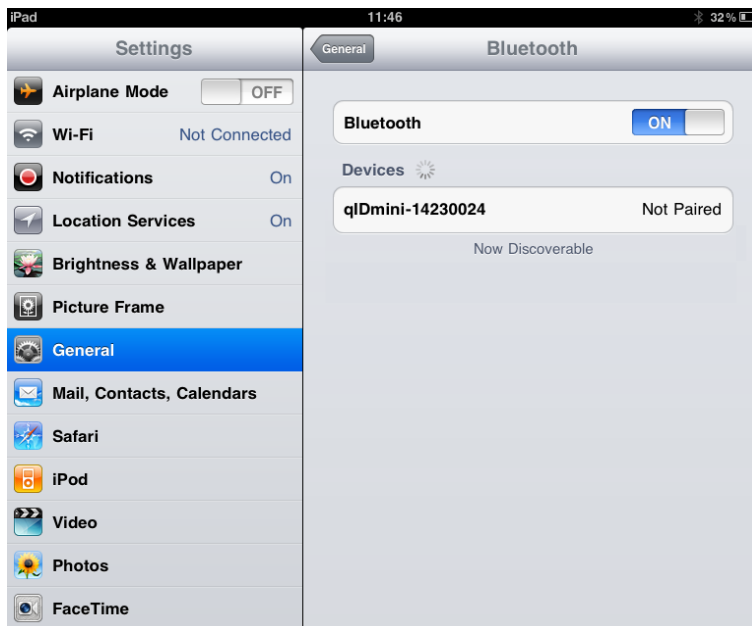

- Click on the qIDmini R1170I reader and wait while the pairing is completed:

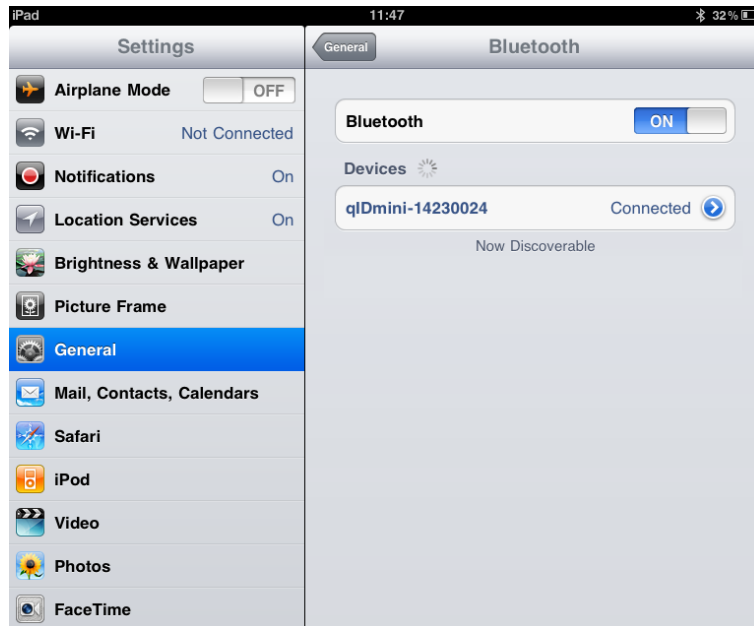

- Once the connection is established the Bluetooth blue light turns on.
- Launch a text editing App (or any other App accepting keyboard input).
- Start an inventory cycle by pressing the trigger button.
- On the text editing App window you will see the EPCs of the tags:

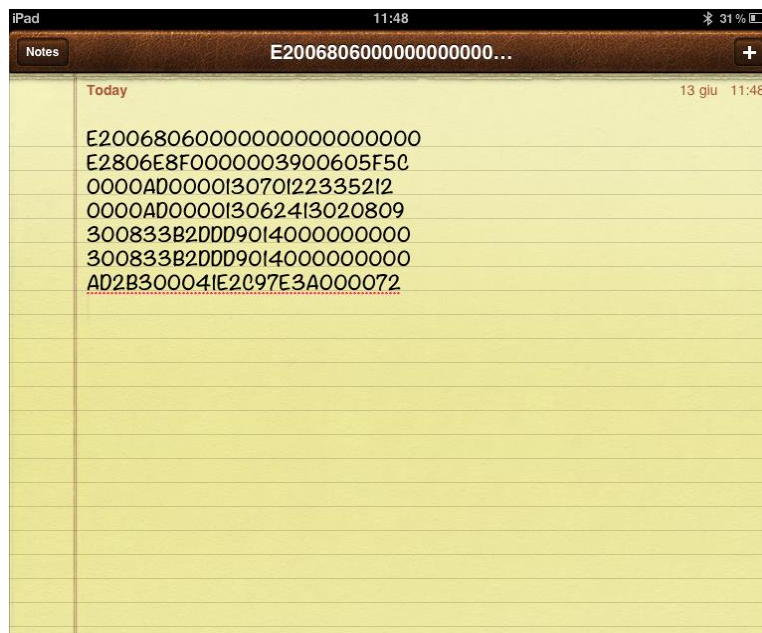

## 5 qIDmini OFFLINE PROFILE

### Introduction

In case of no communication link available, the reader can work in offline mode. The operator goes around collecting codes and then connects the reader to the cable or, better, to the docking station in order to download the data. Stored data can be downloaded to any device except for iOS devices.

For details on the available profiles and on the activation method please refer to § *PROFILE* paragraph page 56.

To perform the tag inventory just hold down the *trigger* button for the desired time.

If the reader reads only a tag, the display shows the EPC code of the tag (if the display scroll is enabled, the flowing text on the display shows the whole EPC of the tag, while if the display scroll is disabled, the display shows the last 8 characters of the tag EPC. See § *DISPLAY* paragraph page 46). If the reader reads more than one tag, the display shows the number of read tags.

The OFFLINE mode is supported only by the HID version of the reader (mod. WR1170IEHIDP, WR1170IUHIDP, WR1170IENFHP, WR1170IUNFHP) and not by the Apple version (mod. WR1170IUAPLP, WR1170IEAPLP).

### OFFLINE profile options

In the OFFLINE profile the reader works in stand-alone mode. You can download data or see the stored tags list by entering the OFFLINE profile options:

1. Turn on the reader, the display shows information on the currently active profile (OFFLINE) and then the message "ready" informs you that the reader is operating.
2. Press quickly the *power* button to enter the OFFLINE profile options, that are:
  - DWNLOAD
  - ERASE
  - VIEWTAG
  - BTSCAN
  - LOGOPT
  - DISPLAY

### DWNLOAD

Hold down the trigger button to enter this option and to download data. Then press quickly the trigger button, a message "send?" will appear. Launch a terminal emulator (e.g. Hyperteminal), connect the reader via Bluetooth (the Bluetooth device is the one identify through the BTSCAN menu option) or USB and then press again quickly the trigger button to start the download.



**Warning:** Note that the data stored in the reader using the OFFLINE mode cannot be downloaded if you activate a different profile (EASY2RD or HID). However data are maintained in memory and, returning to the OFFLINE profile, you can download information.

## ERASE

Hold down the trigger button to enter this option and delete stored data. The text “Erase” on the display starts blinking. Once data is deleted, the device returns to the main menu.

## VIEWTAG

This option shows the list of the read tags during the last scan. Hold down the trigger button to enter this option. Then press quickly the trigger button to scroll the EPC code of the read tags.

## BTSCAN

The BTSCAN option is used to identify the Bluetooth device for the download of stored data.

The BTSCAN searches for the active Bluetooth devices within the read range of the reader.

To activate the discovery of active Bluetooth devices, hold down the trigger button. After about 5 seconds, the reader shows the list of active Bluetooth devices.

To scroll through the active Bluetooth devices list, press quickly (1 time) the trigger button.

To return to the main menu, quickly press the power button.

The currently Bluetooth device is marked with an asterisk.

You can activate only one Bluetooth device at a time.

To activate a different Bluetooth device, scroll through the list by pressing quickly the trigger button until the desired Bluetooth device and then hold down the trigger button for a few seconds: the name of the Bluetooth device will begin to flash. Once activated, the device returns to the main menu.

## LOGOPT

Hold down the trigger button to enter the Log Option:

1. **TIMESTP:** Time Stamp permits to associate date and time to the EPC of the read tags. To enable/disable the TimeStp, hold down the trigger button for a few seconds. The enable (or disable) option will begin to flash. Once activated, the device returns to the main menu.

The currently active state is marked with an asterisk. By default the TimeStp option is disabled.

## DISPLAY

Hold down the trigger button to enter the Display Option:

1. **SCROLL:** Flowing text on display. To enable/disable the display scroll, hold down the trigger button for a few seconds. The chosen option will begin to flash. Once activated, the device returns to the main menu. The currently active state is marked with an asterisk. By default the display scroll is enabled and the flowing text on the display shows the whole EPC of the tag.

If the display scroll is disabled, the display shows the last 8 characters of the tag EPC.

## 6 qIDmini BUFFER PROFILE

### Introduction

For details on the available profiles and on the activation method please refer to § *PROFILE* paragraph page 56.

In the BUFFER mode the reader is Bluetooth connected to the host and executes inventories of tags on button press and stores the EPCs into the internal buffer, even in case of temporary missing of Bluetooth communication. When the Bluetooth link is up, the reader can send the buffered data if requested by the host. Stored data can be downloaded to any device except for iOS devices.

The buffer size is 64KB.

To perform the tag inventory just hold down the *trigger* button for the desired time.

The display shows the number of read tags and information on memory used/total memory, for example:

TAGS 012  
01K/64K


The BUFFER mode is supported only by the HID version of the reader (mod. WR1170IEHIDP, WR1170IUHIDP, WR1170IENFHP, WR1170IUNFHP) and not by the Apple version (mod. WR1170IUAPLP, WR1170IEAPLP).

### Communication Setup


The reader can be connected to the cable or Bluetooth to a PC or Android devices.

#### Android devices

1. On your Android device, go to *Setting* and enable the Bluetooth. A list of the Bluetooth available devices is shown:

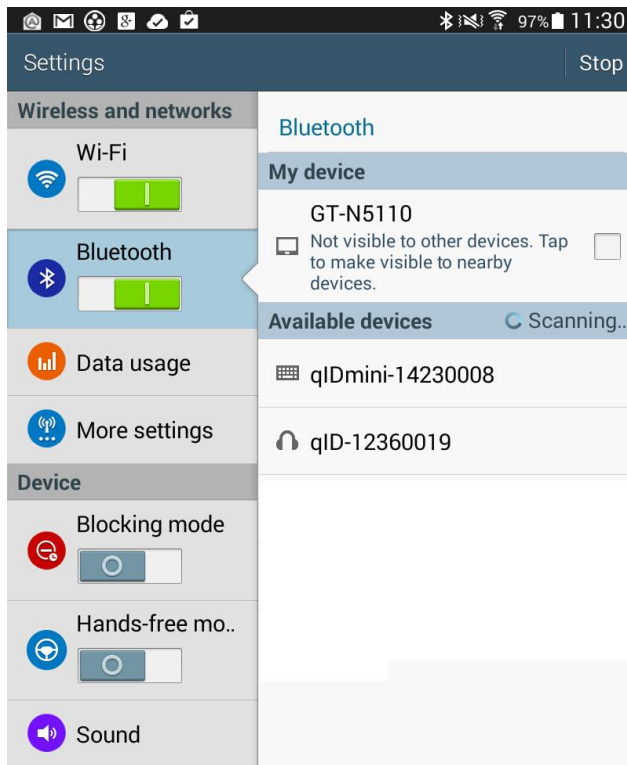

2. Click on the qIDmini R1170I reader and wait while the pairing is completed:

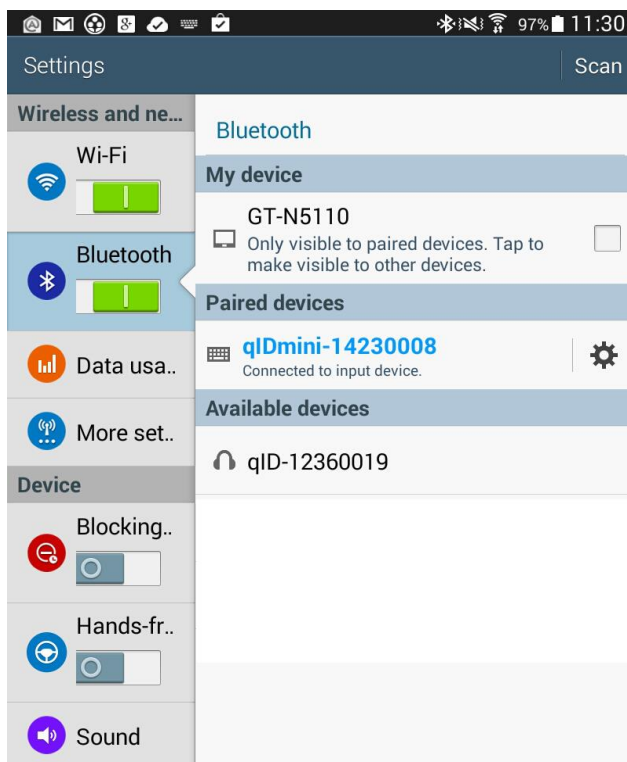

3. Once the connection is established the Bluetooth blue light turns on.




## Windows PCs


### Bluetooth Communication Setup

In case of Windows 8 Operating System:


1. Right click on the *Bluetooth* icon in the taskbar -> *Add a Bluetooth Device*:

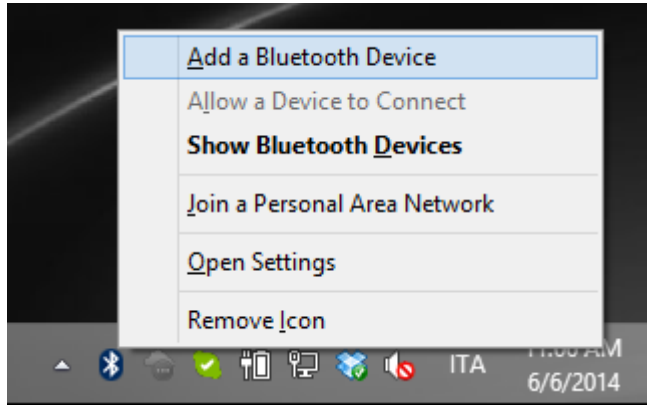

2. Select the qID mini R1170I reader and click on "Pair":

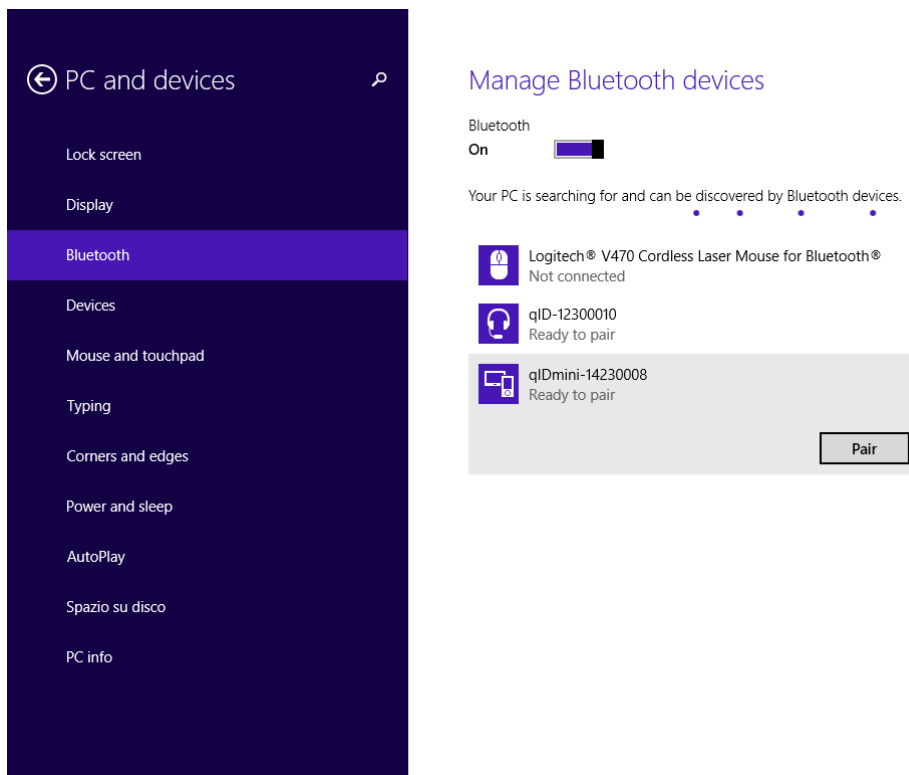

- Click on “yes” to confirm the passcode:

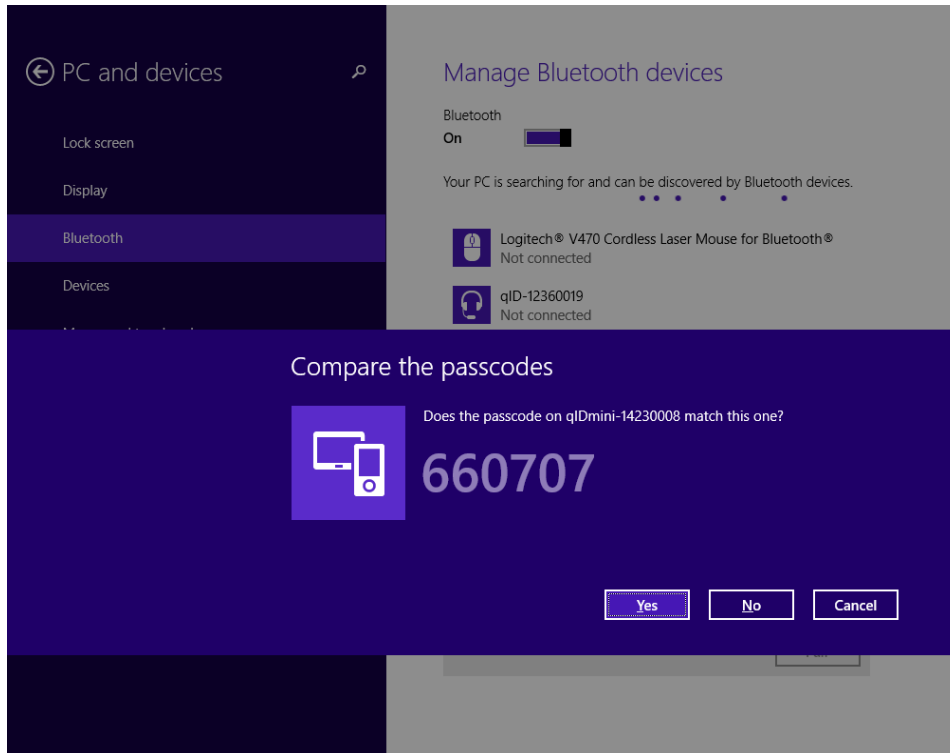


**In case of Windows XP Operating System**, when discovered by the host, the qIDmini reader can be identified by its Bluetooth device name and paired using the pass-key; both parameters are provided below:

- Bluetooth device name: “qIDmini” + device serial number
  - Pass-key: 1234
- Once the connection is established the Bluetooth blue light turns on.


## USB Communication Setup

The qIDmini reader can be connected to a PC using the provided USB cable and it is detected by the PC as an emulated serial port. In order to correctly operate with the reader you need to install a driver.

1. Power OFF the reader, plug the USB cable into the qIDmini USB port and then power ON the reader again.
2. In order to connect the qIDmini reader to the PC you need to install the VCP (Virtual Com Port) drivers for your operating system. You can download VCP drivers for Windows based systems from the CAEN RFID Web Site from the [qIDmini R1170I web page](#), SW/FW section or from the [Software and Firmware download area](#).
3. Open the System properties: go to *Control Panel* → *All Control Panel Items* → *System* and click on *Device Manager*.

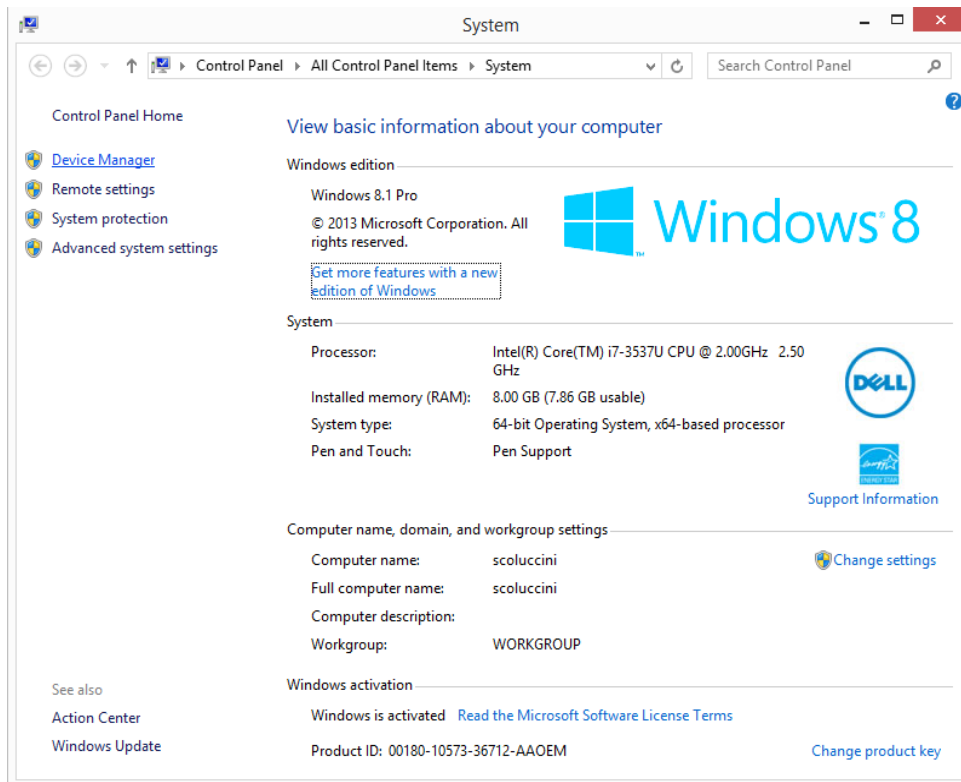

4. After having installed the driver, the reader is detected by the PC as an emulated serial port (VCP):

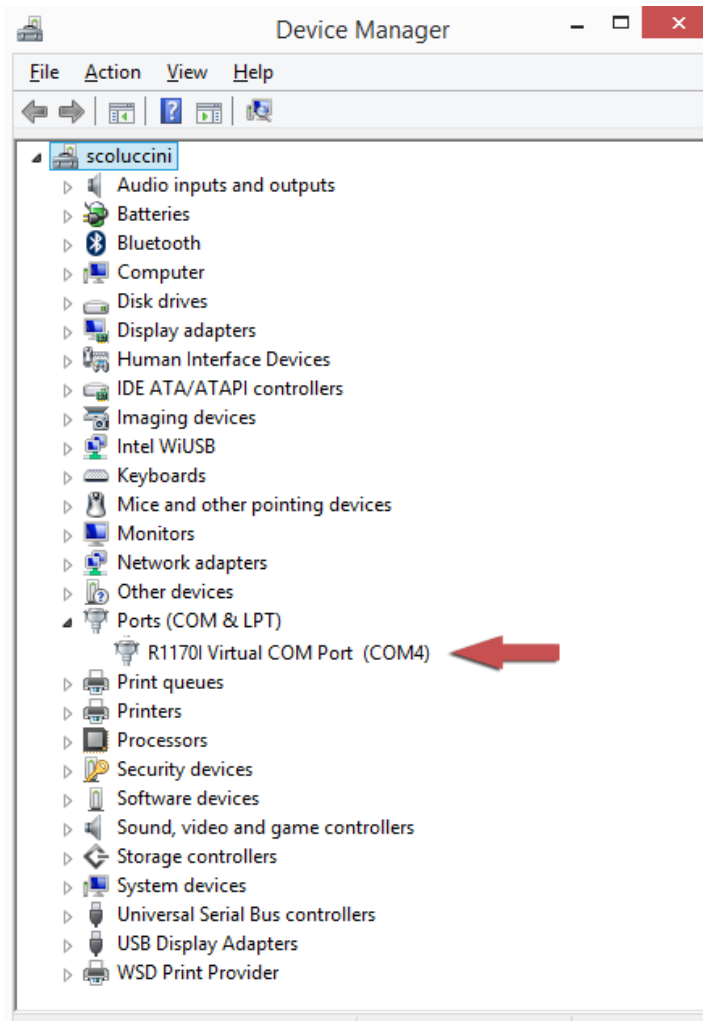

## Download

When the reader is connected to the cable or Bluetooth to a PC or Android devices, it is possible to download buffered data using the CAEN RFID SDK (Software Development Kit).

Particularly, it is possible to download data and manage the reader buffer using the following methods:

- *Get Buffered Data*: this method returns all the tags stored in reader's buffer without delete the memory
- *Clear Buffer*: this method delete all data stored in reader's buffer.
- *Get Buffer Size*: this method returns the number of the tags stored in reader's buffer.

## 7 RESET THE qIDmini READER

To reset the reader, press the *power* and the *trigger* buttons (see § Fig. 1.1: *qIDmini R1170I Front Panel* page 9) simultaneously for about six seconds and then release the buttons. The reader restarts by itself.



**Warning:** Note that the reader SHALL NOT be connected to the USB port or to the battery charger during the reset, otherwise the reader enters in the firmware upgrade state. If, by mistake, you entered in the firmware upgrade state, in order to restore the normal reader operation, disconnect the USB cable and repeat the reset procedure.

## 8 qIDmini CONFIGURATION MENU

### Introduction

To access the main menu, turn on the device and hold down the *trigger* button within two second.


To scroll through the main menu, press quickly the *trigger* button.

The qIDmini R1170I menu options are the following:

- **PROFILE**
- **BEEP**
- **VIBRATE**
- **POWER**
- **CLOCK**
- **OPTIONS**
- **PINCODE**

To select a menu option, hold down the *trigger* button.

The complete structure of the qIDmini R1170I menu is the following:

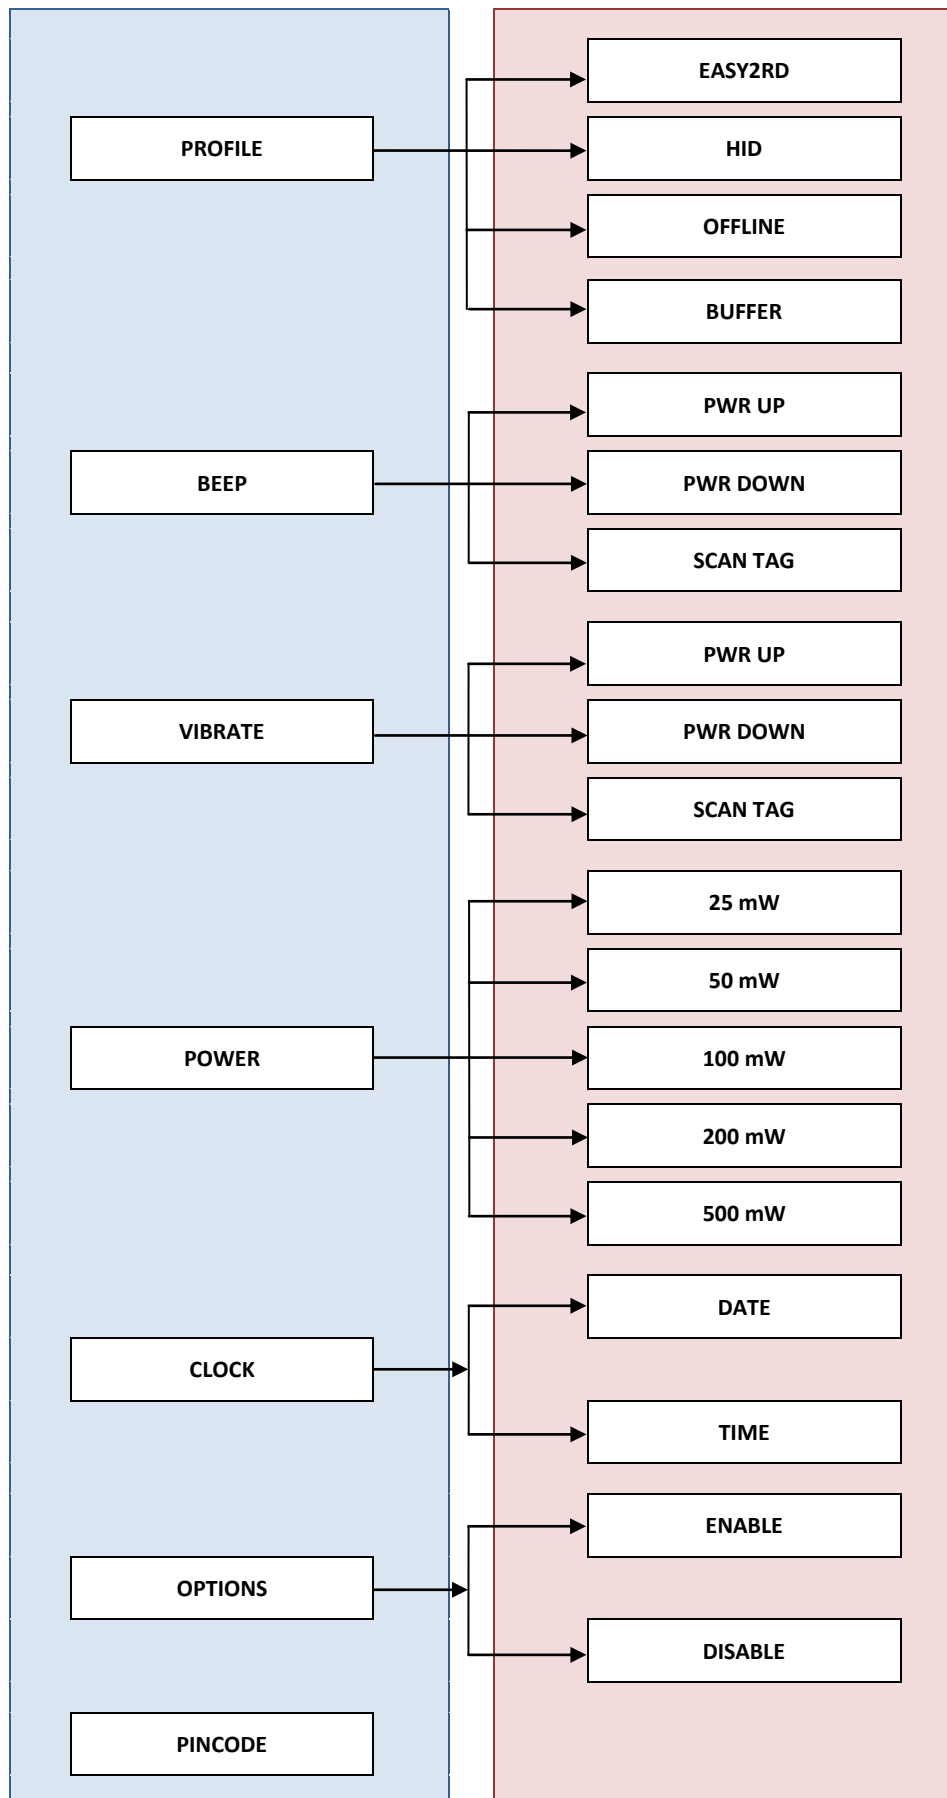

Tab. 8.1: qIDmini R1170I Configuration Menu

## PROFILE

Access the configuration menu as explained in the *Introduction* paragraph page 54.

The PROFILE menu is the first option of the main menu. To select it, hold down the *trigger* button.

To scroll through the PROFILE options, press quickly the *trigger* button. The currently active profile is marked with an asterisk.

The PROFILE submenu options are the following:

- **EASY2RD** (factory default): choosing this option you select the CAEN RFID easy2read communication protocol. Select this option in order to control the reader using the [CAEN RFID Easy Controller Application](#) or the [SDK \(Software Development Kits\)](#) library. For details on the use with the EASY2RD profile please refer to § *QIDMINI EASY2RD PROFILE* chapter page 19.
- **HID**<sup>9</sup>: choosing this option you select the keyboard emulation protocol. For details on the use on the HID profile please refer to § *QIDMINI HID PROFILE* chapter page 34.
- **OFFLINE**: in case of no communication link available, the reader works in offline mode. The operator goes around collecting codes and then connects the reader to the cable or, better, to the docking station in order to download the data. Stored data can be downloaded to any device except for iOS devices.
- **BUFFER**: the reader is Bluetooth connected to the host and executes inventories of tags on button press and stores the EPCs into the internal buffer, even in case of temporary missing of Bluetooth communication. When the Bluetooth link is up, the reader can send the buffered data if requested by the host. Stored data can be downloaded to any device except for iOS devices.

The *EASY2RD* and *HID* profiles require the presence of a nearby host that controls the reader (pc, tablet...), while in the *OFFLINE* and *BUFFER* profile the reader can work in stand-alone mode.

To return to the main menu, quickly press the *power* button.

You can activate only one profile at a time.

To activate a different profile, scroll through the PROFILE options by pressing quickly the *trigger* button until the desired profile is displayed. Hold down the *trigger* button for a few seconds: the name of the profile will begin to flash. Once activated, the device returns to the main menu.

When you turn on the reader, the display shows the currently active profile and then the message "ready" to inform you that the reader is ready to operate.



**Warning:** Note that if the reader is in the **HID** profile you must disconnect it from any connected device before to select another profile.

---

<sup>9</sup> HID profile is not available for qIDmini R1170I with APPLE profile (ordering options: WR1170IEAPLP, WR1170IUAPLP, WR1170IDKEAP, WR1170IDKUAP)



## BEEP

Access the configuration menu as explained in the *Introduction* paragraph page 54.

To scroll through the menu options, press quickly the *trigger* button.

The BEEP menu is the second option of the menu. To select it, hold down the *trigger* button.

The BEEP submenu options are the following:

- **PWRUP:** beep at the power on of the reader
- **PWRDOWN:** beep at the power off of the reader
- **SCANTAG:** beep at the identification of a tag

To enable/disable the submenu options, scroll through the BEEP options menu by pressing quickly the *trigger* button until the desired BEEP option and then hold down the *trigger* button for a few seconds.

Scroll through *enable* and *disable* options by pressing quickly the *trigger* button and hold down the *trigger* button for a few seconds to activate one of them. The *enable* (or *disable*) option will begin to flash. Once activated, the device returns to the main menu.

The currently active state is marked with an asterisk. By default, all the BEEP options are disabled.

Note that you can *enable* or *disable* the beeper for any option independently so that the beeper can be active on more than one option simultaneously.

To return to the main menu, quickly press the *power* button.

## VIBRATE

Access the configuration menu as explained in the *Introduction* paragraph page 54.

To scroll through the menu options, press quickly the *trigger* button.

The VIBRATE menu is the third option of the menu. To select it, hold down the *trigger* button.

The VIBRATE submenu options are the following:

- **PWRUP:** vibration at the power on of the reader
- **PWRDOWN:** vibration at the power off of the reader
- **SCANTAG:** vibration at the identification of a tag

To enable/disable the submenu options, scroll through the VIBRATE options menu by pressing quickly the *trigger* button until the desired VIBRATE option and then hold down the *trigger* button for a few seconds.

Scroll through *enable* and *disable* options by pressing quickly the *trigger* button and hold down the *trigger* button for a few seconds for the activation of one of them. The *enable* (or *disable*) option will begin to flash. Once activated, the device returns to the main menu.

The currently active state is marked with an asterisk. By default, all the VIBRATE options are disabled.

Note that you can *enable* or *disable* the vibration for any option independently so that the vibration can be active on more than one option simultaneously.

To return to the main menu, quickly press the *power* button.

## POWER

Through the POWER menu you can set the power level emitted by the reader.

Note that, when the reader is configured in the EASY2RD profile, to set the power you can also use the [CAEN RFID Easy Controller Application](#) or the *SetPower* function of the [SDK \(Software Development Kits\)](#) library.

Access the configuration menu as explained in the *Introduction* paragraph page 54.

To scroll through the menu options, press quickly the *trigger* button.

The POWER menu is the fourth option of the menu. To select it, hold down the *trigger* button.

The POWER submenu options are the following:

- **25 mW**
- **50 mW**
- **100 mW**
- **200 mW**
- **500 mW**

To scroll through the POWER options, press quickly the *trigger* button.

To return to the main menu, quickly press the *power* button.

The currently active power is marked with an asterisk. By default, the 200 mW power level is active.

You can activate only one power level at a time.

To activate a different power level, scroll through the POWER options by pressing quickly the *trigger* button until the desired power level is displayed. Hold down the *trigger* button for a few seconds: the power level option will begin to flash. Once activated, the device returns to the main menu.

## CLOCK

The reader does not consider date and time until the first setting by the user.

To access the CLOCK option, turn off the device and then turn on it again and during the boot process hold down the *trigger* button (see § *Front panel* page 9) for a few seconds.

To scroll through the menu options, press quickly (1 time) the *trigger* button.

The CLOCK menu is the last option of the menu. To select it, hold down the *trigger* button: in this way you will enter its sub-menu.

The CLOCK submenu options are the following:

- **Date:** the date is the first option of the clock submenu. To set the date hold down the *trigger* button for a few seconds. The date is shown in the format **dd mmm yy** (e.g. 28 Oct 15). Press quickly the *trigger* button to change the *day* value. Then hold down the *trigger* button to save the *day* and pass to the *month* value. Press quickly the *trigger* button to change the *month* value. Then hold down the *trigger* button to save the *month* and pass to the *year* value. Press quickly the *trigger* button to change the *year* value. Then hold down the *trigger* button to save the *year* and hold down again to save the complete date. The date begins to flash and the reader returns to the main menu.
- **Time:** is displayed in the 24-hour format **hh:mm** (e.g. 12:51) the time is the second option of the clock submenu. Scroll through the CLOCK options menu by pressing quickly the *trigger* button until the *Time* option is displayed and then hold down the *trigger* button for a few seconds to set the time. The time is shown in the 24-hour format **hh:mm** (e.g. 12:51). Press quickly the *trigger* button to change the *hh* value. Then hold down the *trigger* button to save the *hour value* and pass to the *minutes* value. Press quickly the *trigger* button to change the “*mm*” value. Then hold down the *trigger* button to save the *minutes value* and hold down again to save the complete time. The time begins to flash and the reader returns to the main menu.

To return to the main menu, quickly press the *power* button.

In the OFFLINE profile, if you are interested in showing the date and time information of the read tags, you need to set the *clock* and enable the *Time Stamp* (see § *LOGOPT* pag. 46).

## OPTIONS

Through this option, you can enable/disable the correspondent profile options.

By default this value is enabled and the user can access the profile options (for more info on the available profile options, please refer to § *EASY2READ profile options* page 19, *HID profile options* page 34, *OFFLINE profile options* page 45).

Set the value to disabled in order to deny the access to the profile options.

## PINCODE

The PINCODE is a personal identification number (PIN) of 4 digits length used to authenticate the user who accesses the main configuration menu

The following list shows the accepted characters for the PINCODE:

'0', '1', '2', '3', '4', '5', '6', '7', '8', '9'

By default the PINCODE string is empty. To set the PINCODE, hold down the *trigger* button for a few seconds. The PINCODE string empty is shown. Press quickly the *trigger* button to change the *first* value. Then hold down the *trigger* button to save the first value. Press quickly the *trigger* button to change the *second* value. Then hold down the *trigger* button to save the second value and so on until the fourth digit. Then press quickly the power button to fix the PINCODE string and then hold down the trigger button to save it. The PINCODE begins to flash and the reader returns to the main menu. It is possible to insert a shorter PINCODE string.

To return to the main menu, quickly press the *power* button.

To restore the empty string, go to PINCODE option and hold down the trigger button. The current active PINCODE is shown. Press quickly the trigger button to restore the empty string. Then press quickly the power button to fix the PINCODE string and then hold down the trigger button to save it.



**Warning:** Note that it is not possible to retrieve a forgotten PIN. In this case the user has to send the reader to CAEN RFID Return&Repair service.

## 9 qIDmini FIRMWARE UPGRADE

### Firmware Upgrade

The qIDmini R1170I firmware upgrade can be managed via USB by using the SW upgrade program. The qIDmini Upgrade Tool is available for free at the [qIDmini R1170I web page](#) of the CAEN RFID Web Site, SW/FW section.


In order to upgrade the firmware follow the steps described below:

1. Connect the qIDmini reader to the USB port of the PC.
2. Press simultaneously the *trigger* and the *power* button for about six seconds.
3. Open the FW upgrade program.
4. Click on *Next* button:




5. In the window you will see the message "Found 1 device" (if the message is "No device connected" repeat the points 2,3, 4 and 5).

6. Select the FW image file by clicking on the “Browse” button:

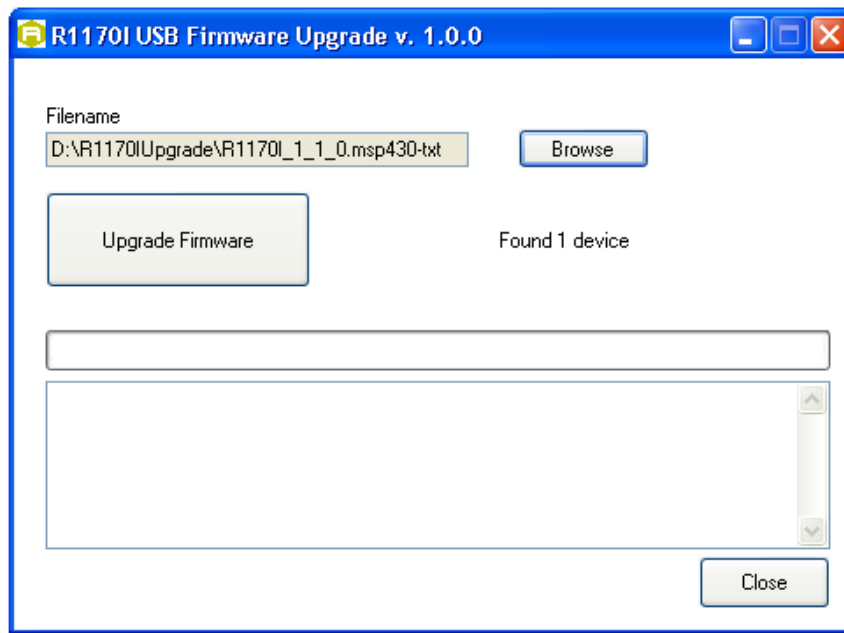

7. Click on the “Upgrade Firmware” button and wait for the upgrade process to be completed.
8. At the end of procedure, if the upgrade has been successfully performed, you will see the messages reported in the image below and the module is ready for normal operation.

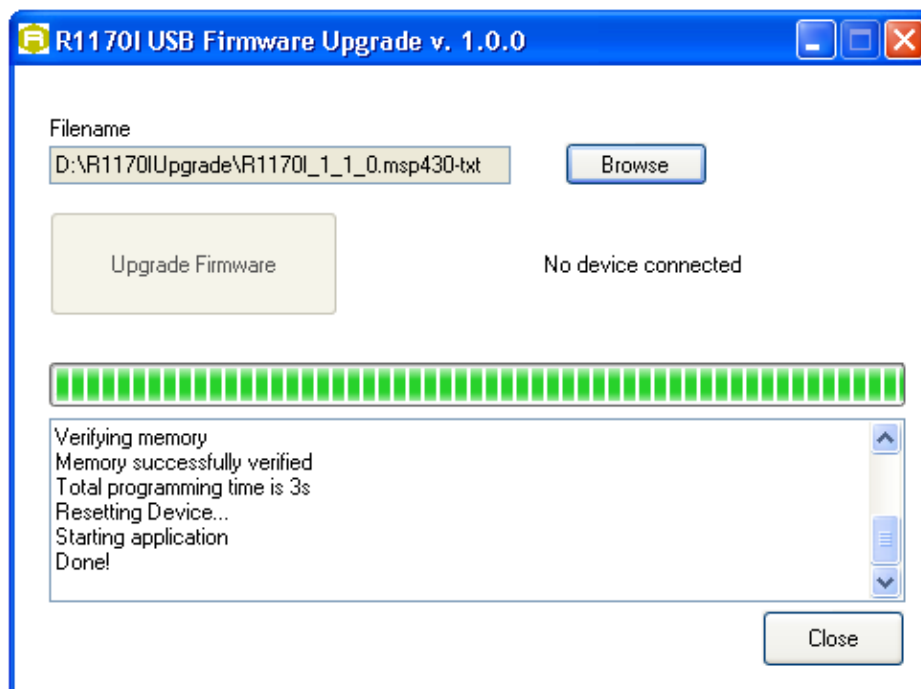

# 10 qIDmini TECHNICAL SPECIFICATIONS

## Technical Specifications Table

(Mod. R1170IEHIDP, R1170IEAPLP, R1170IUHIDP and R1170IUAPLP)

<b>Frequency Band</b>	865.600÷867.600 MHz (ETSI EN 302 208 v. 1.4.1) (Mod. R1170IEHIDP and R1170IEAPLP) 902÷928 MHz (FCC part 15.247) (Mod. R1170IUHIDP and R1170IUAPLP)
<b>RF Power</b>	Programmable in 18 levels from 5dBm e.r.p. (3mW e.r.p.) to 22dBm e.r.p. (150mW e.r.p.)
<b>Antenna</b>	Integrated linear (horizontal)
<b>Number of Channels</b>	4 channels (compliant to ETSI EN 302 208 v. 1.4.1)(Mod. R1170IEHIDP and R1170IEAPLP) 50 hopping channels (compliant to FCC part 15.247)(Mod. R1170IUHIDP and R1170IUAPLP)
<b>Standard Compliance</b>	ISO 18000-6C/EPC C1G2
<b>Read Range</b>	up to 90cm (typical)
<b>Connectivity</b>	USB Interface: USB 2.0 Full Speed (12 Mbit/s) device port Bluetooth Interface: Class 2 with output power 4dBm e.i.r.p. Virtual COM port parameters: - Baudrate: up to 230.400kbps - Databits: 8 - Stopbits: 1 - Parity: none - Flow control: none HID profile available (mod. R1170IEHIDP and R1170IUHIDP) Apple compatibility available (mod. R1170IEAPLP and R1170IUAPLP)
<b>User Interface</b>	Button #1: ON/OFF Button #2: Trigger Led #1: power indication and battery status (green: high; red: low) Led #2: communication activity (blue: Bluetooth; orange: USB) Buzzer: bitonal for events signalling Vibration: for events signalling Display: LCD Alphanumeric (8 chars x 2 lines)
<b>Internal Buffer Size</b>	48kByte (equivalent to 4096 EPC codes@96bit) (TBC)
<b>Battery Type</b>	Li-Ion 3.7V, 570mAh
<b>Battery Life</b>	Operating: > 12h with 40.000 tag readings Standby: > 15 days
<b>Battery Charging Time</b>	2h (typical)
<b>IP Rating</b>	IP 32
<b>Dimensions</b>	(W)99 x (L)54 x (H)20 mm <sup>3</sup> max. (3.9 x 2.1 x 0.8 in <sup>3</sup> )
<b>Length of USB cable</b>	1.5 m
<b>Operating Temperature</b>	-10 °C to +55 °C
<b>Weight</b>	57 g

Tab. 10.1: qIDmini R1170I Technical Specifications Table



**Warning:** The RF settings must match the country/region of operating to comply with local laws and regulations.

The usage of the reader in different countries/regions from the one in which the device has been sold is not allowed.

## Technical Specifications Table

(Mod. R1170IENFHD and R1170IUNFHD)

<b>Frequency Band</b>	865.600÷867.600 MHz (ETSI EN 302 208 v. 2.1.1) (Mod. R1170IENFHD) 902÷928 MHz (FCC part 15.247) (Mod. R1170IUNFHD) 920.625÷924.375 MHz (SRRC RFID national standards) (Mod. R1170IUNFHD – OPT. WPE1170NFACN)
<b>RF Power</b>	Programmable in 18 levels from 0dBm e.r.p. (1mW e.r.p.) to 17dBm e.r.p. (50mW e.r.p.)
<b>Antenna</b>	Integrated UHF Near Field Antenna
<b>Number of Channels</b>	4 channels (compliant to ETSI EN 302 208 v. 2.1.1)(Mod. R1170IENFHD) 50 hopping channels (compliant to FCC part 15.247)(Mod. R1170IUNFHD) 16 hopping channels (compliant to SRRC RFID national standards) (Mod. R1170IUNFHD – OPT. WPE1170NFACN).
<b>Standard Compliance</b>	ISO 18000-6C/EPC C1G2
<b>Connectivity</b>	USB Interface: USB 2.0 Full Speed (12 Mbit/s) device port Bluetooth Interface: Class 2 with output power 4dBm e.i.r.p. Virtual COM port parameters: - Baudrate: up to 230.400kbps - Databits: 8 - Stopbits: 1 - Parity: none - Flow control: none
<b>User Interface</b>	Button #1: ON/OFF Button #2: Trigger Led #1: power indication and battery status (green: high; red: low) Led #2: communication activity (blue: Bluetooth; orange: USB) Buzzer: bitonal for events signalling Vibration: for events signalling Display: LCD Alphanumeric (8 chars x 2 lines)
<b>Internal Buffer Size</b>	48kByte (equivalent to 4096 EPC codes@96bit) (TBC)
<b>Battery Type</b>	Li-Ion 3.7V, 570mAh
<b>Battery Life</b>	Operating: > 12h with 40.000 tag readings Standby: > 15 days
<b>Battery Charging Time</b>	2h (typical)
<b>IP Rating</b>	IP 30
<b>Dimensions</b>	(W)106 x (L)58 x (H)20 mm <sup>3</sup> max. (4.2 x 2.3 x 0.8 in <sup>3</sup> )
<b>Length of USB cable</b>	1.5 m
<b>Operating Temperature</b>	-10 °C to +55 °C
<b>Weight</b>	58 g

Tab. 10.2: qIDminiNF R1170INF Technical Specifications Table



**Warning:** The RF settings must match the country/region of operating to comply with local laws and regulations.  
The usage of the reader in different countries/regions from the one in which the device has been sold is not allowed.

## Reader – Tag Link Profiles

The qIDmini R1170I reader supports different modulations and return link profiles according to EPC Class1 Gen2 protocol [RD2].

All profiles that have been tested for the compliance with ETSI and FCC regulations are reported in the following table:

Link profile #	Regulation	Modulation	Return Link
0	ETSI - FCC	PR-ASK; f=40kHz	FM0; f = 40kHz
1	ETSI - FCC	PR-ASK; f=40kHz	Miller (M=4); f = 256kHz <sup>10</sup>
2	ETSI - FCC	PR-ASK; f=40kHz	Miller (M=4); f = 320kHz

Tab. 10.3: qIDmini R1170I Reader to tag link profiles

---

<sup>10</sup> Default value.



## Radiation Patterns

The radiation patterns of qIDmini R1170I are shown in the following figures.

### Model R1170IEHIDP and R1170IEAPLP (ETSI version)

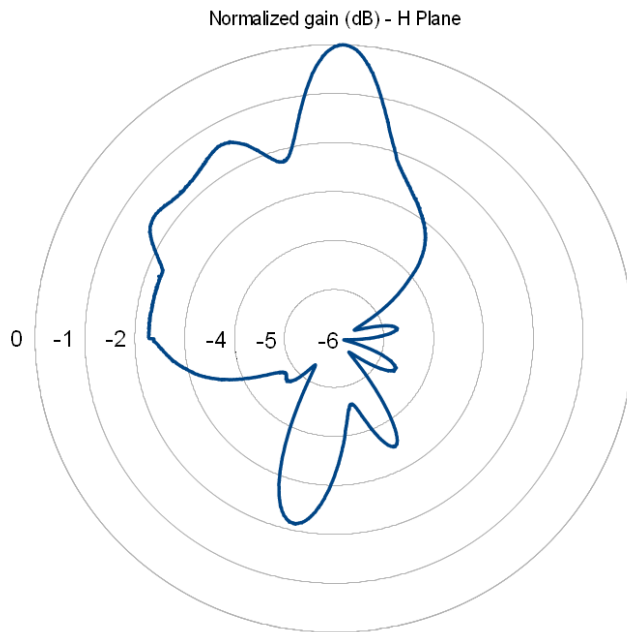


Fig. 10.1: qIDmini R1170IE Radiation pattern H plane


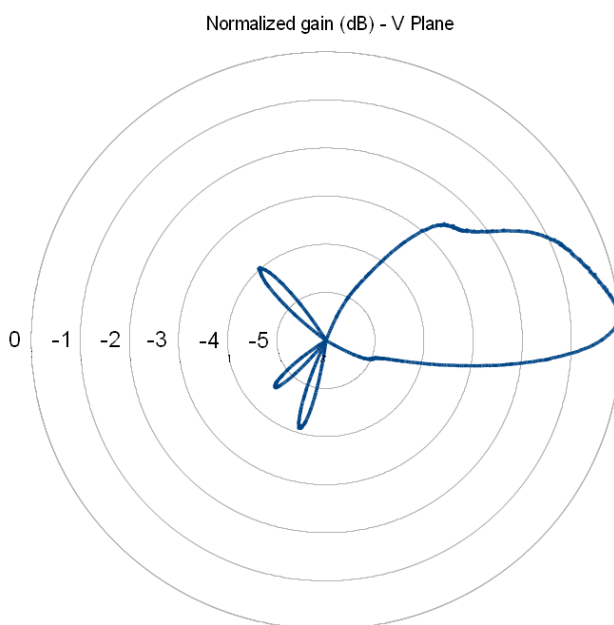


Fig. 10.2: qIDmini R1170IE Radiation pattern V plane

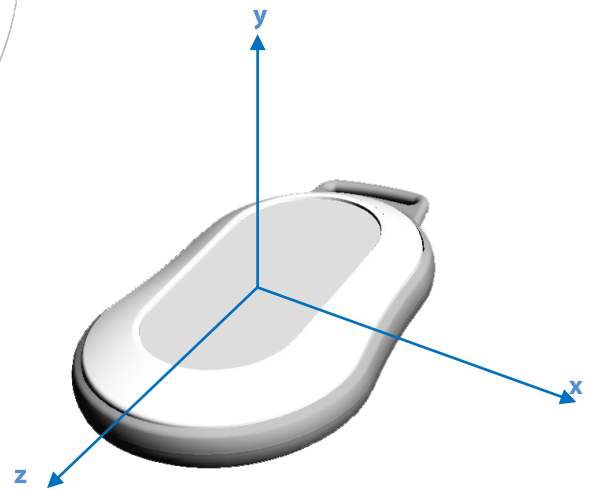

## Model R1170IUHIDP and R1170IUAPLP (FCC version)

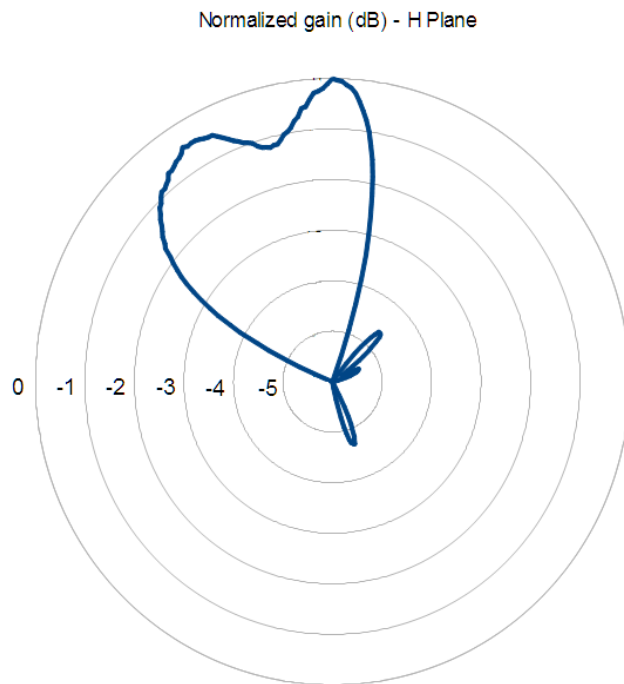


Fig. 10.3: qIDmini R1170IU Radiation pattern H plane


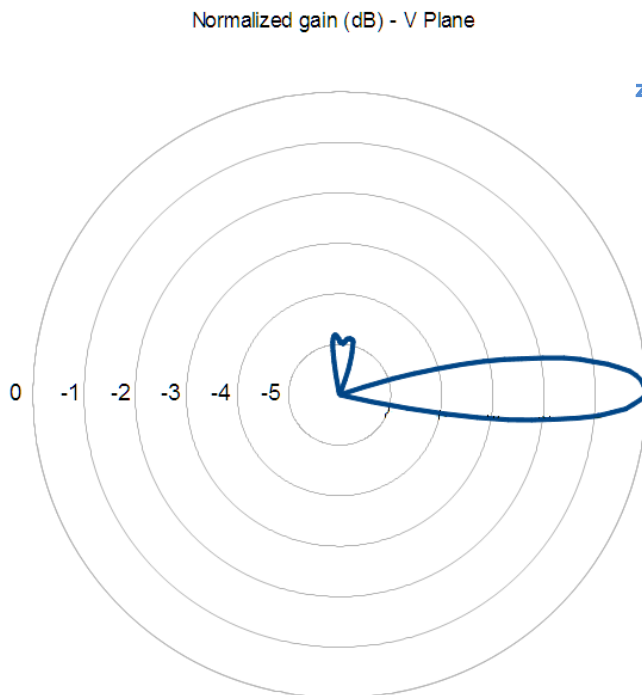


Fig. 10.4: qIDmini R1170IU Radiation pattern V plane

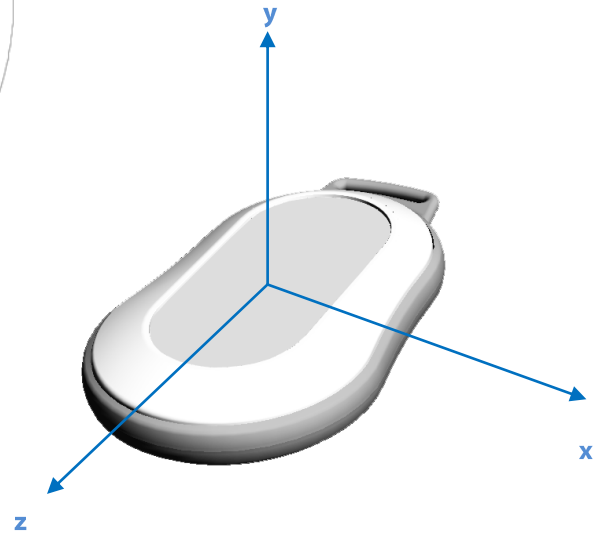

# 11 qIDmini REGULATORY COMPLIANCE

## FCC Compliance

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- a. Reorient or relocate the receiving antenna.
- b. Increase the separation between the equipment and receiver.
- c. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- d. Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modification not approved by CAEN RFID could void the user's authority to operate the equipment.

### **Mod. R1170IUHIDP and R1170IUAPLP:**

Reference document:

Test report n. FCC-14414 [RD2].

See § *qIDmini FCC Grant part B* and *qIDmini FCC Grant part C* page 70 and 71 for the qID mini R1170I FCC Compliance Certificate.

### **Mod. R1170IUNFHD:**

Reference document:

Test report n. FCC-16601 [RD6].

See § *qIDminiNF FCC Grant part B* and *qIDminiNF FCC Grant part C* page 73 and 74 for the qID mini NF R1170I FCC Compliance Certificate.

## CE Compliance

### **Mod. R1170IEHIDP, R1170IEAPLP:**

Reference standard:

ETSI EN 301 489-1 V. 1.9.2:2011  
ETSI EN 301 489-3 V. 1.6.1:2013  
ETSI EN 301 489-17 V. 2.2.1:2012  
ETSI EN 302 208-2 V. 1.4.1:2011  
ETSI EN 300 328 V1.9.1:2015  
CEI EN 60950-1:2007 + VAR  
CEI EN 50364:2011  
CEI EN 55022:2014

Reference documents:

Test report n. 14414 [RD1].

See § *qIDmini CE Declaration of Conformity* page 69 for the qID mini R1170I CE Compliance Certificate.

### **Mod. R1170IENFHD:**

Reference standard:

ETSI EN 301 489-1 V. 1.9.2:2011  
ETSI EN 301 489-3 V. 1.6.1:2013  
ETSI EN 302 208-2 V. 2.1.1:2015  
ETSI EN 300 328-1 V1.9.1:2015  
CEI EN 60950-1:2007 + VAR  
CEI EN 50364:2011  
CEI EN 55024:2013  
CEI EN 55022:2014

Reference documents:

Test report n. 16601A [RD4].

See § *qIDminiNF CE Declaration of Conformity* page 72 for the qID mini NF R1170I CE Compliance Certificate.

## SRRC Compliance

### **Mod. qIDmini NF with customization WPE1170NFACNR1170IENFHD:**

Reference standard:

Test report n. SRTL/BG-A20160150123 [RD7].

See § *qIDminiNF SRRC Type Approval Certificate* page 75 for the qID mini NF R1170I SRRC Certificate.

## RoHS EU Directive

qIDmini R1170I Reader is compliant with the EU Directive 2011/65/CE on the Restriction of the Use of certain Hazardous Substances in Electrical and Electronic Equipment (RoHS2).

# qID<sub>mini</sub> R1170I

## CE DECLARATION OF CONFORMITY

We

CAEN RFID Srl  
Via Vetraria, 11  
55049 Viareggio (LU)  
Italy  
Tel.: +39.0584.388.398 Fax: +39.0584.388.959  
Mail: [info@caenrfid.com](mailto:info@caenrfid.com)  
Web site: [www.caenrfid.com](http://www.caenrfid.com)

herewith declare under our own responsibility that the products:

<b>Code:</b>	<b>WR1170IEAPLP</b>
<b>Description:</b>	<b>R1170IEAPLP - qIDmi Keyfob Bluetooth UHF RFID Reader (ETSI) with Apple profile</b>
	and
<b>Code:</b>	<b>WR1170IEHIDP</b>
<b>Description:</b>	<b>R1170IEHIDP - qIDmini Keyfob Bluetooth UHF RFID Reader (ETSI) with HID profile</b>

correspond in the submitted version to the following standards:

ETSI EN 301 489-1 V. 1.9.2:2011  
ETSI EN 301 489-3 V. 1.6.1:2013  
ETSI EN 301 489-17 V. 2.2.1:2012  
ETSI EN 302 208-2 V. 1.4.1:2011  
ETSI EN 300 328 V1.9.1:2015  
CEI EN 60950-1:2007 + VAR  
CEI EN 50364:2011  
CEI EN 55022:2014

and declare under our sole responsibility that the specified products meet the principle requirements and other applicable regulations of directives 2014/53/EU (RED) and 2011/65/EU (RoHS2)

Date: 26/05/2016

  
CAEN RFID Srl  
Via Vetraria, 11  
55049 VIAREGGIO - ITALY  
VAT IT 02032050466

Adriano Bigongiari (Chief Executive Officer)

On the basis of this declaration, these products will bear the following mark:



# qID<sub>mini</sub> R1170I

## FCC GRANT PART B

# TCB

### GRANT OF EQUIPMENT AUTHORIZATION

# TCB

**Certification**  
**Issued Under the Authority of the**  
**Federal Communications Commission**  
**By:**

**EMCCert Dr. Rasek GmbH**  
**Stoernhofer Berg 15**  
**91364 Unterleinleiter,**  
**Germany**

**Date of Grant: 10/01/2014**  
**Application Dated: 10/01/2014**

**CAEN RFID srl**  
**via Vetraila, 11 - 55049 Viareggio (LU) - ITALY**  
**Viareggio, 55049**  
**Italy**

**Attention: Adriano Bigongiari , CEO**


### NOT TRANSFERABLE

EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is VALID ONLY for the equipment identified hereon for use under the Commission's Rules and Regulations listed below.

**FCC IDENTIFIER:** UVECAENRFID017  
**Name of Grantee:** CAEN RFID srl  
**Equipment Class:** Part 15 Class B Computing Device Peripheral  
**Notes:** R1170I - qIDmini Keyfob Bluetooth UHF RFID Reader

<u>Grant Notes</u>	<u>FCC Rule Parts</u>	<u>Frequency Range (MHZ)</u>	<u>Output Watts</u>	<u>Frequency Tolerance</u>	<u>Emission Designator</u>
CC	15B	-			

CC: This device is certified pursuant to two different Part 15 rules sections.

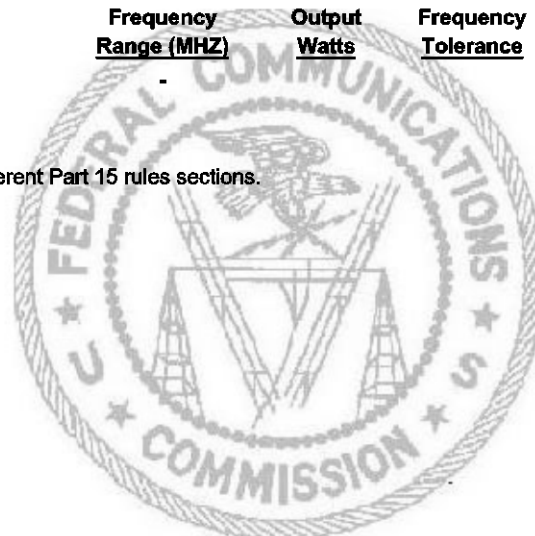

**qIDmini R1170I**  
**FCC GRANT PART C**

**TCB**

**GRANT OF EQUIPMENT  
AUTHORIZATION**

**TCB**

**Certification**  
**Issued Under the Authority of the**  
**Federal Communications Commission**  
**By:**

**EMCCert Dr. Rasek GmbH**  
**Stoernhofer Berg 15**  
**91364 Unterleinleiter,**  
**Germany**

**Date of Grant: 10/01/2014**  
**Application Dated: 10/01/2014**

**CAEN RFID srl**  
**via Vetraria, 11 - 55049 Viareggio (LU) - ITALY**  
**Viareggio, 55049**  
**Italy**

**Attention: Adriano Bigonglari , CEO**

**NOT TRANSFERABLE**

EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and  
is VALID ONLY for the equipment identified hereon for use under the  
Commission's Rules and Regulations listed below.

**FCC IDENTIFIER:** UVECAENRFID017  
**Name of Grantee:** CAEN RFID srl  
**Equipment Class:** Part 15 Spread Spectrum Transmitter  
**Notes:** R1170I - qIDmini Keyfob Bluetooth UHF  
RFID Reader

<u>Grant Notes</u>	<u>FCC Rule Parts</u>	<u>Frequency Range (MHZ)</u>	<u>Output Watts</u>	<u>Frequency Tolerance</u>	<u>Emission Designator</u>
CC	15C	902.75 - 927.25	0.162		

Power output listed is peak conducted. The antenna(s) used for this transmitter must  
be installed to provide a separation distance of at least 20 cm from all persons and  
must not be co-located or operating in conjunction with any other antenna or  
transmitter except in accordance with FCC accepted multi-transmitter procedures.  
End-users and installers must be provided with antenna installation instructions and  
transmitter operating conditions for satisfying RF exposure compliance.

CC: This device is certified pursuant to two different Part 15 rules sections.

# qIDminiNF R1170INF

## CE DECLARATION OF CONFORMITY

We

CAEN RFID Srl  
Via Vetràia, 11  
55049 Viareggio (LU)  
Italy  
Tel.: +39.0584.388.398 Fax: +39.0584.388.959  
Mail: info@caenrfid.com  
Web site: www.caenrfid.com

herewith declare under our own responsibility that the product:

**Code:** R1170IENFHD  
**Description:** qIDmini - Keyfob Bluetooth UHF NF RFID Reader (ETSI) with HID profile

corresponds in the submitted version to the following standards:

ETSI EN 301 489-1 V. 1.9.2:2011  
ETSI EN 301 489-3 V. 1.6.1:2013  
ETSI EN 302 208-2 V. 2.1.1:2015  
ETSI EN 300 328-1 V1.9.1:2015  
CEI EN 60950-1:2007 + VAR  
CEI EN 50364:2011  
CEI EN 55024:2013  
CEI EN 55022:2014

and declare under our sole responsibility that the specified product meets the principle requirements and other applicable regulations of directives 2014/53/EU (RED) and 2011/65/EU (RoHS2)

Date: 24/10/2016

  
CAEN RFID Srl  
Via Vetràia, 11  
55049 VIAREGGIO - ITALY  
VAT IT 02032050466

Adriano Bigongiari (Chief Executive Officer)



On the basis of this declaration, these products will bear the following mark:



# qIDminiNF R1170INF

## FCC GRANT PART B

**TCB**

**GRANT OF EQUIPMENT  
AUTHORIZATION**

**TCB**

**Certification**  
Issued Under the Authority of the  
Federal Communications Commission  
By:

EMCCert Dr. Rasek GmbH  
Stoernhofer Berg 15  
91364 Unterleinleiter,  
Germany

Date of Grant: 07/26/2016  
Application Dated: 07/26/2016

CAEN RFID srl  
via Vetrata, 11 - 55049 Viareggio (LU) - ITALY  
Viareggio, 55049  
Italy

Attention: Adriano Bigonglari , CEO

**NOT TRANSFERABLE**

EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is  
VALID ONLY for the equipment identified hereon for use under the Commission's  
Rules and Regulations listed below.

FCC IDENTIFIER: UVECAENRFID023  
Name of Grantee: CAEN RFID srl  
Equipment Class: Part 15 Class B Computing Device Peripheral  
Notes: R1170IUNFHP - qIDmini Keyfob UHF NF RFID Reader

<u>Grant Notes</u>	<u>FCC Rule Parts</u>	<u>Frequency Range (MHZ)</u>	<u>Output Watts</u>	<u>Frequency Tolerance</u>	<u>Emission Designator</u>
CC	15B				

CC: This device is certified pursuant to two different Part 15 rules sections.



# qIDminiNF R1170INF

## FCC GRANT PART C

**TCB**

**GRANT OF EQUIPMENT  
AUTHORIZATION**

**TCB**

**Certification  
Issued Under the Authority of the  
Federal Communications Commission  
By:**

**EMCCert Dr. Rasek GmbH  
Stoernhofer Berg 15  
91364 Unterleinleiter,  
Germany**

**Date of Grant: 07/26/2016  
Application Dated: 07/26/2016**

**CAEN RFID srl  
via Vetrata, 11 - 55049 Viareggio (LU) - ITALY  
Viareggio, 55049  
Italy**

**Attention: Adriano Bigongiarl , CEO**

**NOT TRANSFERABLE**


EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is VALID ONLY for the equipment identified hereon for use under the Commission's Rules and Regulations listed below.

**FCC IDENTIFIER:** UVECAENRFID023  
**Name of Grantee:** CAEN RFID srl  
**Equipment Class:** Part 15 Spread Spectrum Transmitter  
**Notes:** R1170JUNFHP - qIDmini Keyfob UHF NF RFID Reader

<u>Grant Notes</u>	<u>FCC Rule Parts</u>	<u>Frequency Range (MHZ)</u>	<u>Output Watts</u>	<u>Frequency Tolerance</u>	<u>Emission Designator</u>
CC	15C	902.75 - 927.25	0.047		

Power output listed is ERP. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 15 mm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC accepted multi-transmitter procedures. End-users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.

CC: This device is certified pursuant to two different Part 15 rules sections.

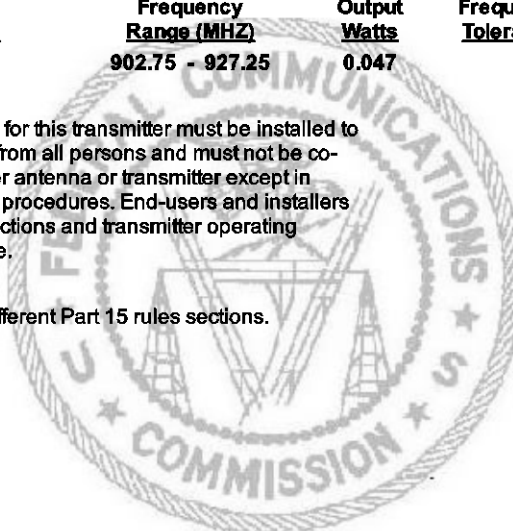

**qID<sub>miniNF</sub> R1170INF**

# SRRC TYPE APPROVAL CERTIFICATE

**无线电发射设备**  
Radio Transmission Equipment  
**型号核准证**  
Type Approval Certificate

意大利 CAEN RFID S. R. L. :

**根据《中华人民共和国无线电管理**

In accordance with the provisions on the Radio

**条例》，经审查，下列无线电发射设备**  
Regulations of the People's Republic of China , the following

**符合中华人民共和国无线电管理规定和**  
radio transmission equipment , after examination , conforms

**技术标准，其核准代码为：CMIIT ID: 2016DJ5851**  
to the provisions with its CMIIT ID:

有效期:

Validity 五年



Sealed by issuing authority

2016年 9 月 23 日  
Year Month Date

编号: 2016-5851

Number

设备名称: 射频识别(RFID)/蓝牙设备  
Equipment Name

设备型号: WPE1170NFACN  
Equipment Type

主要功能: 数据传输  
Main Functions

调制方式: ASK GFSK/  $\pi$ /4DQPSK/8DPSK  
Modulation Mode

主要技术参数及其指标值:  
Main Technical Parameters

频率范围: 920.5-924.5MHz 2400-2483.5 MHz  
Frequency Range

频率容限:  $\leq 20\text{ppm}$   
Frequency Tolerance

发射功率:  $\leq 2\text{W}$  (e. r. p)  $\leq 20\text{dBm}$  (EIRP)  
Transmitting Power

占用带宽:  $\leq 250\text{kHz}$   $\leq 1\text{MHz}$   
Occupied Bandwidth

杂散发射限值  $\leq -30\text{dBm}$   
Spurious Emission Limits

